


**SEISMIC TESTS ON EKA PANO  
ELECTRICAL PANEL  
MODEL: EF SERIES, EF PLUS SERIES**

**TEST REPORT**

**ON BEHALF OF: EKA PANO VE KABIN SISTEMLERI SAN. TIC. LTD. ŞTI.**

**RAT-MTL-ELE20-023-R00**

Document of 46 pages

Written:	Mauro Amadei		11/05/2020
Verified and approved:	Michele Civera		12/05/2020

## REVISIONS TRACK

Date	Version	Description of changes	Reference
May 2020	00	First issue	

The present report can not be partially reproduced without written approval by P&P LMC Srl.

The results are referred only to the tested items.

The Quality System of P&P LMC is in compliance with the ISO 9001:2015 standard for the following activities: Qualification of industrial products; Physical, mechanical and chemical testing of construction materials; Chemical analysis of environmental matrix, industrial hygiene, emissions to atmosphere; Calibration service of mechanical, electromechanical and electronic measurement devices (CSQ Certificate No. 9175.ILMC – IQNet Certificate No. IT – 20582).

P&P LMC laboratory is qualified by RINA to perform tests with “Sollecitazioni statiche e dinamiche sulle opere d’arte ferroviarie, modalità costruttive e di verifica strutturale (Static and dynamic stresses on railway products, construction methods and structural verification)” and tests (3 – 17 – 20) listed in Annex XI of D.L. 191/2010 and it is in compliance with the UNI EN 17025 standard (Qualification Certificate No. 05/2007 Rev. 3).

## CONTENTS

<b>REVISIONS TRACK .....</b>	<b>2</b>
<b>1. GENERAL DATA.....</b>	<b>4</b>
1.1. CUSTOMER.....	4
1.2. UNIT UNDER TEST .....	4
1.3. MANUFACTURER .....	4
1.4. REFERENCE DOCUMENTS .....	4
1.4.1. <i>Contract documents</i> .....	4
1.4.2. <i>Technical documents and standards</i> .....	5
1.5. TEST OBJECTIVE.....	5
1.6. TESTING LABORATORY .....	5
1.7. TEST DATE .....	5
1.8. RESPONSIBILITIES .....	5
1.9. WITNESSES .....	5
<b>2. TESTING PROCEDURES .....</b>	<b>6</b>
2.1. GENERAL REMARKS .....	6
2.2. MOUNTING TECHNIQUES.....	6
2.3. CONTROL AND MEASURING POSITIONS.....	6
2.4. SEISMIC TESTS .....	7
2.4.1. <i>Resonance frequency search</i> .....	7
2.4.2. <i>Earthquake test</i> .....	7
<b>3. MEASURING, EXCITATION AND DATA PROCESSING EQUIPMENT .....</b>	<b>8</b>
3.1. EXCITATION EQUIPMENT.....	8
3.2. MEASURING EQUIPMENT.....	8
3.3. DATA ACQUISITION AND PROCESSING INSTRUMENTATION .....	9
<b>4. TEST RESULTS .....</b>	<b>10</b>
4.1. SEISMIC TESTS .....	10
4.1.1. <i>Tests in X direction</i> .....	10
4.1.2. <i>Tests in Y direction</i> .....	10
4.1.3. <i>Tests in Z direction</i> .....	11
4.2. GENERAL REMARKS .....	11
<b>LIST OF FIGURES .....</b>	<b>12</b>
<b>PHOTO DOCUMENTATION .....</b>	<b>12</b>

## 1. GENERAL DATA

### 1.1. Customer

*EKA PANO ve Kabin Sistemleri San. Tic. Ltd. Şti.*  
Akçaburgaz Mah. 3101 Sk. No:8/1  
Esenyurt - İstanbul  
TURKEY

### 1.2. Unit under test

The tests were performed on *EKA PANO electrical panel* with the following characteristics:

<p><i>Model/Type:</i> <i>EF Series</i> <i>EF Plus Series</i></p>	
--	---

### 1.3. Manufacturer

EKA PANO ve Kabin Sistemleri San. Tic. Ltd. Şti.

### 1.4. Reference documents

#### 1.4.1. Contract documents

- Offer P&P LMC No. OFF-MTL-ELE20-032-R00, dated March 4<sup>th</sup>, 2020.
- Order EKA PANO: acceptance of OFF-MTL- ELE20-032-R00, dated March 20<sup>th</sup>, 2020.

## 1.4.2. Technical documents and standards

1. Telcordia Technologies Generic Requirements GR-63-CORE NEBS Requirements: Physical Protection, Issue 3, March 2006;
2. IEC 60068-3-3:1991 Environmental testing - Part 3-3: Guidance - Seismic test methods for equipments;
3. IEC 60068-2-6 Environmental testing - Part 2-6: Tests - Test Fc: Vibration (sinusoidal);
4. IEC 60068-2-57 Environmental testing - Part 2-57: Tests - Test Ff: Vibration - Time-history method;
5. IEEE Std 693-2005 IEEE Recommended Practice for Seismic Design of Substations;
6. ISO 2041 Vibration and Shock – Vocabulary.

## 1.5. Test objective

The purpose of the seismic tests was to demonstrate that the unit behave in compliance with the requirements stated in doc.[1] referring to a seismic risk classified in as *Zone 4* on the Telcordia Earthquake Zone Map. The following table correlates the earthquake risk zone with the expected Richter Magnitude, Modified Marcalli Index, and the expected ground and building accelerations.

Earthquake Risk Zone	Richter Magnitude	Modified Marcalli Index (MMI)	Low Frequency Ground Acceleration (g's)	Low Frequency Upper Building Floor Acceleration (g's)
0	< 4.3	V	< 0.05	< 0.2
1	4.3 - 5.7	V - VII	0.05 - 0.1	0.2 - 0.3
2	5.7 - 6.3	VII - VIII	0.1 - 0.2	0.3 - 0.4
3	6.3 - 7.0	VIII - IX	0.2 - 0.4	0.4 - 0.6
4	7.0 - 8.3	IX - XII	0.4 - 0.8	0.6 - 1.0

## 1.6. Testing laboratory

P&P LMC S.r.l.  
via Pastrengo, 9  
24068 Seriate (BG)  
ITALY

## 1.7. Test date

May 5<sup>th</sup> - 6<sup>th</sup>, 2020.

## 1.8. Responsibilities

M. Civera; test responsible – M. Amadei; test engineer.

## 1.9. Witnesses

No witnesses.

## 2. TESTING PROCEDURES

### 2.1. General remarks

To perform the tests, three reference directions have been considered for the unit: X (front - rear), Y (side - side) and Z (vertical).

The sequence of the seismic tests has been:

- *initial resonance frequency search*, performed in three directions (X, Y, Z);
- *earthquake test*, performed in three directions (X, Y, Z);
- *final resonance frequency search*, performed in three directions (X, Y, Z).

All the applied vibrations were monodirectional.

Tests in Z direction were performed on a vertical shaking table moved by an electro-dynamic shaker. For the other excitation directions, a horizontal shaking table was used. Excitation directions are shown in the photographs.

All the performed tests are listed in the table of page 16. Tests were numbered following the chronological sequence.

### 2.2. Mounting techniques

For all tests the unit was mounted in its intended operating configuration.

The unit was fixed to the shaking table with No. 4 M14 screws, with a tightening torque of 80 Nm.

### 2.3. Control and measuring positions

During all the tests, for the motion control, the signal of a monoaxial accelerometer (CP1) in the excitation direction was used. Moreover, two triaxial accelerometers (MP1 and MP2) were placed on the unit for the vibration measurement (see photos).

In the following table are summarized model and serial number of the transducers mounted in the control and measuring positions during the tests.

<i>Point ID</i>	<i>Accelerometer</i>		<i>Tests</i>
	<i>Model</i>	<i>Serial Number</i>	
<b>CP1 (X,Y,Z)</b> Control position located on shaking table	PCB 353B03 (monoaxial)	210161	All tests
<b>MP1 (X,Y,Z)</b> Measuring position located on the top of the panel	DYTRAN 3023A6 (triaxial)	982901 (X)	All tests
		982902 (Y)	
		982903 (Z)	
<b>MP2 (X,Y,Z)</b> Measuring position located at middle height of the panel	DYTRAN 3023A6 (triaxial)	983002 (X)	All tests
		983003 (Y)	
		983001 (Z)	

## 2.4. Seismic tests

### 2.4.1. Resonance frequency search

The aim of these tests was to find the resonance frequencies of the unit. In X, Y and Z direction, the unit was subjected to sine sweep, with the parameters defined in the following table.

<b>RESONANCE FREQUENCY SEARCH</b>	<i>Sine vibration parameters</i>		
	<i>Frequency range:</i>	1 – 50 Hz	
	<i>Level:</i>	1 – 2,23 Hz	10 mm (peak displacement)
		2,23 – 50 Hz	0,2 g (peak acceleration)
	<i>Sweep rate:</i>	1 oct/min	
	<i>Duration:</i>	1 sweep	
	<i>Direction:</i>	X, Y, Z	

Signals from measuring accelerometers were processed to obtain the absolute response functions of the control channel and the frequency transfer functions of the measuring channels on the panel.

### 2.4.2. Earthquake test

In X, Y and Z direction, the earthquake was performed with reference to the Required Response Spectrum (RRS) reported in doc. [1] for Zone 4 risk area, with the parameters defined in the table.

<b>EARTHQUAKE TEST</b>	<i>Earthquake parameters (Zone 4)</i>		
	<i>Frequency range:</i>	0,3 – 50 Hz	
	<i>RRS level:</i>	0,3 Hz	0,2 g
		0,6 Hz	2,0 g
		2 Hz	5,0 g
		5 Hz	5,0 g
		15 Hz	1,6 g
		50 Hz	1,6 g
	<i>Damping:</i>	2 % (Q = 25)	
	<i>Duration:</i>	30 seconds / axis	
<i>Number of events:</i>	1 / axis		
<i>Direction:</i>	X, Y, Z		

The filtered time history was applied to the unit after acceptance of Customer's technicians, based on duration, amplitude, shape and degree of envelope of the Required Response Spectrum.

## 3. MEASURING, EXCITATION AND DATA PROCESSING EQUIPMENT

### 3.1. Excitation equipment

Vibration tests in vertical direction were carried out using an electrodynamic shaker manufactured by ELIN, type MZV 210 W 20 S/N 713255, with the following characteristics:

- maximum sinusoidal dynamic force: 100 kN;
- moving element weight: 100 kg;
- frequency range: 0 ÷ 2000 Hz;
- max. displacement (peak to peak): 50,8 mm;
- max. acceleration: 100 g.

Vibration tests in horizontal directions were carried out using a magnesium slip table (operated by the previously described ELIN shaker) with the following characteristics:

- maximum sinusoidal dynamic force: 100 kN;
- moving element weight: 300 kg;
- frequency range: 0 ÷ 2000 Hz;
- max. displacement (peak to peak): 50,8 mm;
- max. acceleration: 33,3 g

### 3.2. Measuring equipment

Accelerometers employed during all the tests were PCB 353B03, monoaxial accelerometer, and DYTRAN 3023A6, triaxial accelerometers, with incorporated amplifiers.

The main characteristics of the accelerometers are listed below:

#### PCB 353B03:

- Nominal sensitivity: 10 mV/g;
- Transverse sensitivity (max): < 5%;
- Frequency range: 1 ÷ 7000 Hz;
- Max. acceleration: +/- 500 g;
- Resolution: 0,01g;
- Weight: 0,105 N

#### DYTRAN 3023A6:

- Nominal sensitivity: 5 mV/g
- Transverse sensitivity (max): < 5%
- Frequency range axis 1 & 2: 1,5 ÷ 5000 Hz
- Frequency range axis 3: 1,5 ÷ 10000 Hz
- Max. acceleration: +/- 1000 g
- Resolution: 0,010g
- Weight: 0,04 N

The frequency response of the whole measuring chain is flat, in the frequency range from 3 to 3000 Hz, with an accuracy of  $\pm 5\%$ .

Serial number of the employed accelerometer is listed in the above reported table. The instrumentation is submitted to a calibration program in accordance with internal procedures.

### **3.3. Data acquisition and processing instrumentation**

During all the tests the shaker was controlled by a computer based system (the digital system LMS International) which is composed by an acquisition panel of 16 channels and by a PC. This control system generates the motion with the requested characteristics and feeds-back the shaker motion using the signal coming from the accelerometer chosen for the control.

Analogue signals coming from the accelerometers were amplified and conveyed to an analogue/digital converter, which sent the data to the disk storage of the aforementioned minicomputer for subsequent processing.

The block scheme of the excitation, acquisition and processing equipment is shown at page 15.

## 4. TEST RESULTS

### 4.1. Seismic tests

The seismic tests were performed by applying an artificial time history obtained starting from the Required Response Spectrum as reported in doc. |1|, with a 200 Hz sampling frequency. In order to fit the required displacement with the maximum allowable displacement of the test equipment, the drive signal was filtered with a high-pass filter at 4 Hz: the filtering was imposed on the basis of the results of the resonance frequency search performed in all the three excitation directions, showing that the cut-off frequency was lower of the lowest natural frequency of the unit before the earthquake test. In this case the Test Response Spectrum of the obtained shaking table acceleration (TRS CP1) is dominating the Required Response Spectrum (Telcordia RRS - Zone 4) of the reference doc. |1| in the frequency range from 4 to 50 Hz and the test can be accepted because the specimen was correctly excited around its natural frequencies. For every direction a comparison is given of the Required Response Spectrum with the Test Response Spectrum at a damping value of 2% analyzed with 12 points per octave. In any case the test was run in order to get a peak acceleration of the excitation time history greater than the Zero Period Acceleration of the specified Required Response Spectrum.

#### 4.1.1. Tests in X direction

##### Initial resonance frequency search

Figures at pages 17 - 19 show the absolute response function relevant to the control accelerometer (AvgCtrl) and the frequency transfer functions relevant to the measuring accelerometers (MP1 and MP2) placed on the unit, recorded during the initial resonance frequency search performed before the earthquake test.

##### Earthquake test

Figures at page 20 show the acceleration time history relevant to the control accelerometer (CP1) and the relative displacement time history of the top of the unit, obtained during the earthquake simulation.

Figures at pages 21 - 22 show the acceleration time histories relevant to the measuring accelerometers (MP1 and MP2), obtained during the earthquake simulation.

Figure at page 23 show the Test Response Spectrum (TRS - solid line) compared with Telcordia Zone 4 Required Response Spectrum (RRS - dashed line), obtained during the earthquake simulation.

##### Final resonance frequency search

Figures at pages 24 - 26 show the absolute response function relevant to the control accelerometer (AvgCtrl) and the frequency transfer functions relevant to the measuring accelerometers (MP1 and MP2) placed on the unit, recorded during the initial resonance frequency search performed after the earthquake test.

#### 4.1.2. Tests in Y direction

##### Initial resonance frequency search

Figures at pages 27 - 29 show the absolute response function relevant to the control accelerometer (AvgCtrl) and the frequency transfer functions relevant to the measuring accelerometers (MP1 and

MP2) placed on the unit, recorded during the initial resonance frequency search performed before the earthquake test.

## **Earthquake test**

Figures at page 30 show the acceleration time history relevant to the control accelerometer (CP1) and the relative displacement time history of the top of the unit, obtained during the earthquake simulation.

Figures at pages 31 - 32 show the acceleration time histories relevant to the measuring accelerometers (MP1 and MP2), obtained during the earthquake simulation.

Figure at page 33 show the Test Response Spectrum (TRS - solid line) compared with Telcordia Zone 4 Required Response Spectrum (RRS - dashed line), obtained during the earthquake simulation.

## **Final resonance frequency search**

Figures at pages 34 - 36 show the absolute response function relevant to the control accelerometer (AvgCtrl) and the frequency transfer functions relevant to the measuring accelerometers (MP1 and MP2) placed on the unit, recorded during the initial resonance frequency search performed after the earthquake test.

### **4.1.3. Tests in Z direction**

#### **Initial resonance frequency search**

Figures at pages 37 - 39 show the absolute response function relevant to the control accelerometer (AvgCtrl) and the frequency transfer functions relevant to the measuring accelerometers (MP1 and MP2) placed on the unit, recorded during the initial resonance frequency search performed before the earthquake test.

#### **Earthquake test**

Figures at page 40 show the acceleration time history relevant to the control accelerometer (CP1) and the relative displacement time history of the top of the unit, obtained during the earthquake simulation.

Figures at pages 41 - 42 show the acceleration time histories relevant to the measuring accelerometers (MP1 and MP2), obtained during the earthquake simulation.

Figure at page 43 show the Test Response Spectrum (TRS - solid line) compared with Telcordia Zone 4 Required Response Spectrum (RRS - dashed line), obtained during the earthquake simulation.

#### **Final resonance frequency search**

Figures at pages 44 - 46 show the absolute response function relevant to the control accelerometer (AvgCtrl) and the frequency transfer functions relevant to the measuring accelerometers (MP1 and MP2) placed on the unit, recorded during the initial resonance frequency search performed after the earthquake test.

## **4.2. General remarks**

At the end of the tests, at a visual inspection, no mechanical failure was detected on the unit.

Considering the requirement stated in doc [1], the unit supported the Earthquake Test forecasted for Risk Zone 4.

The results of further checks on the unit are of CUSTOMER's responsibility.


## LIST OF FIGURES

- Page 15:* Block diagram of the excitation and measuring equipment.  
*Page 16:* List of the performed tests.  
*Pages 17 ÷ 46:* Recordings during the tests.

## PHOTO DOCUMENTATION

- Photo 1:* Test configuration for seismic test in X direction.  
*Photo 2:* Test configuration for seismic test in Y direction.  
*Photo 3:* Test configuration for seismic test in Z direction.  
*Photo 4:* Measuring accelerometers MP1 and MP2.

*Photo 1: Test configuration for seismic test in X direction*

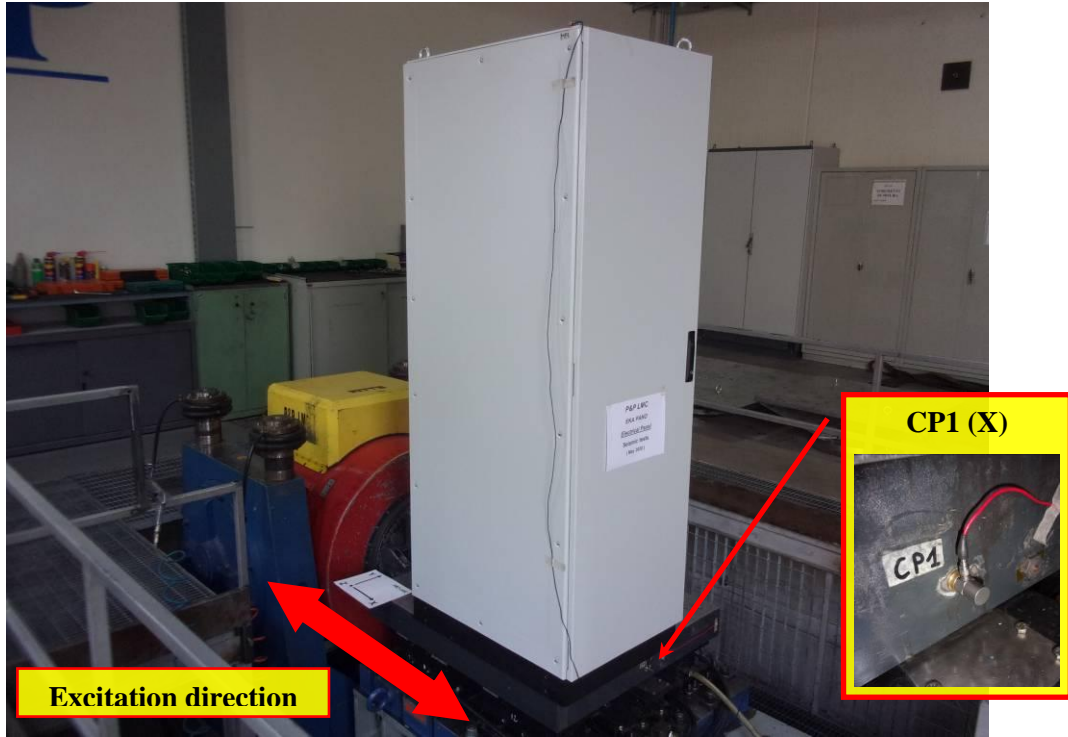

*Photo 2: Test configuration for seismic test in Y direction*

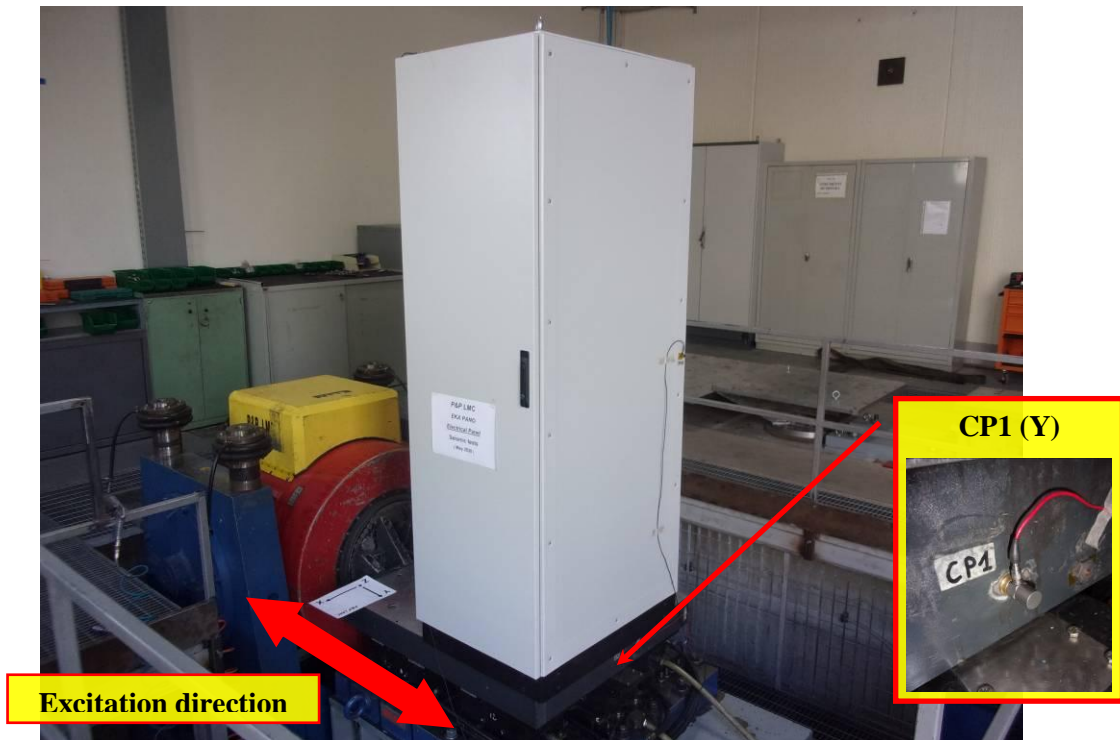



Photo 3: Test configuration for seismic test in Z direction



Photo 4: Measuring accelerometers MP1 and MP2



### BLOCK DIAGRAM RELEVANT TO THE DYNAMIC TESTS


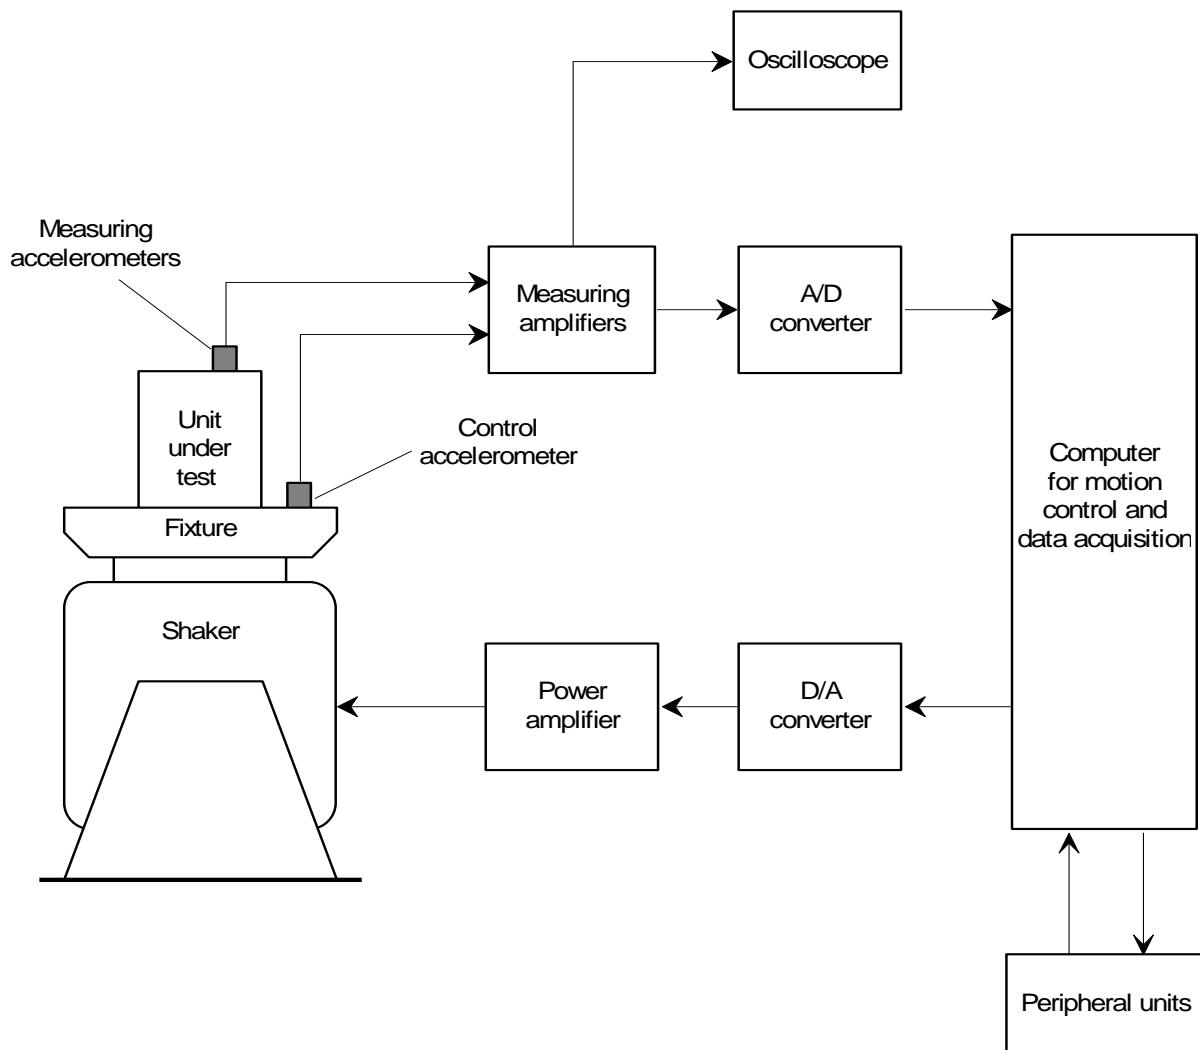


**LIST OF THE PERFORMED TESTS**

<b>Test No.</b>	<b>Test Type</b>	<b>Axis</b>	<b>Test parameters</b>	<b>Duration [h:min:sec]</b>	<b>Pages</b>
1	SEISMIC TESTS: initial resonance frequency search	X	<u>Frequency range:</u> 1 Hz - 50 Hz <u>Excitation levels:</u> 1 - 2.23 Hz @ 10 mm 2.23 - 200 Hz @ 0.2 g <u>Sweep rate:</u> 1 oct/min	0:05:39	17 - 19
2	SEISMIC TESTS: earthquake simulation	X	<u>Frequency range:</u> 0.3 Hz - 50 Hz <u>RRS:</u> 0.3 Hz @ 0.2 g 0.6 Hz @ 2 g 2 Hz @ 5 g 5 Hz @ 5 g 15 Hz @ 1.6 g 50 Hz @ 1.6 g <u>ZPA:</u> 1.6 g <u>Damping:</u> 2%	0:00:30	20 - 23
3	SEISMIC TESTS: final resonance frequency search	X	<u>Frequency range:</u> 1 Hz - 50 Hz <u>Excitation levels:</u> 1 - 2.23 Hz @ 10 mm 2.23 - 200 Hz @ 0.2 g <u>Sweep rate:</u> 1 oct/min	0:05:39	24 - 26
4	SEISMIC TESTS: initial resonance frequency search	Y	<u>Frequency range:</u> 1 Hz - 50 Hz <u>Excitation levels:</u> 1 - 2.23 Hz @ 10 mm 2.23 - 200 Hz @ 0.2 g <u>Sweep rate:</u> 1 oct/min	0:05:39	27 - 29
5	SEISMIC TESTS: earthquake simulation	Y	<u>Frequency range:</u> 0.3 Hz - 50 Hz <u>RRS:</u> 0.3 Hz @ 0.2 g 0.6 Hz @ 2 g 2 Hz @ 5 g 5 Hz @ 5 g 15 Hz @ 1.6 g 50 Hz @ 1.6 g <u>ZPA:</u> 1.6 g <u>Damping:</u> 2%	0:00:30	30 - 33
6	SEISMIC TESTS: final resonance frequency search	Y	<u>Frequency range:</u> 1 Hz - 50 Hz <u>Excitation levels:</u> 1 - 2.23 Hz @ 10 mm 2.23 - 200 Hz @ 0.2 g <u>Sweep rate:</u> 1 oct/min	0:05:39	34 - 36
7	SEISMIC TESTS: initial resonance frequency search	Z	<u>Frequency range:</u> 1 Hz - 50 Hz <u>Excitation levels:</u> 1 - 2.23 Hz @ 10 mm 2.23 - 200 Hz @ 0.2 g <u>Sweep rate:</u> 1 oct/min	0:05:39	37 - 39
8	SEISMIC TESTS: earthquake simulation	Z	<u>Frequency range:</u> 0.3 Hz - 50 Hz <u>RRS:</u> 0.3 Hz @ 0.2 g 0.6 Hz @ 2 g 2 Hz @ 5 g 5 Hz @ 5 g 15 Hz @ 1.6 g 50 Hz @ 1.6 g <u>ZPA:</u> 1.6 g <u>Damping:</u> 2%	0:00:30	40 - 43
9	SEISMIC TESTS: final resonance frequency search	Z	<u>Frequency range:</u> 1 Hz - 50 Hz <u>Excitation levels:</u> 1 - 2.23 Hz @ 10 mm 2.23 - 200 Hz @ 0.2 g <u>Sweep rate:</u> 1 oct/min	0:05:39	44 - 46

<b>Project:</b> MTL-20-018
<b>Section:</b> X axis
<b>Run:</b> Sine_1
<b>Date:</b> Wed May 06 2020 08:16:36
<b>Point id:</b> AvgCtrl
<b>No. control channels:</b> 1
<b>Control strategy:</b> Average
<b>Sweep rate:</b> 1 Oct/min


Resonance frequency search

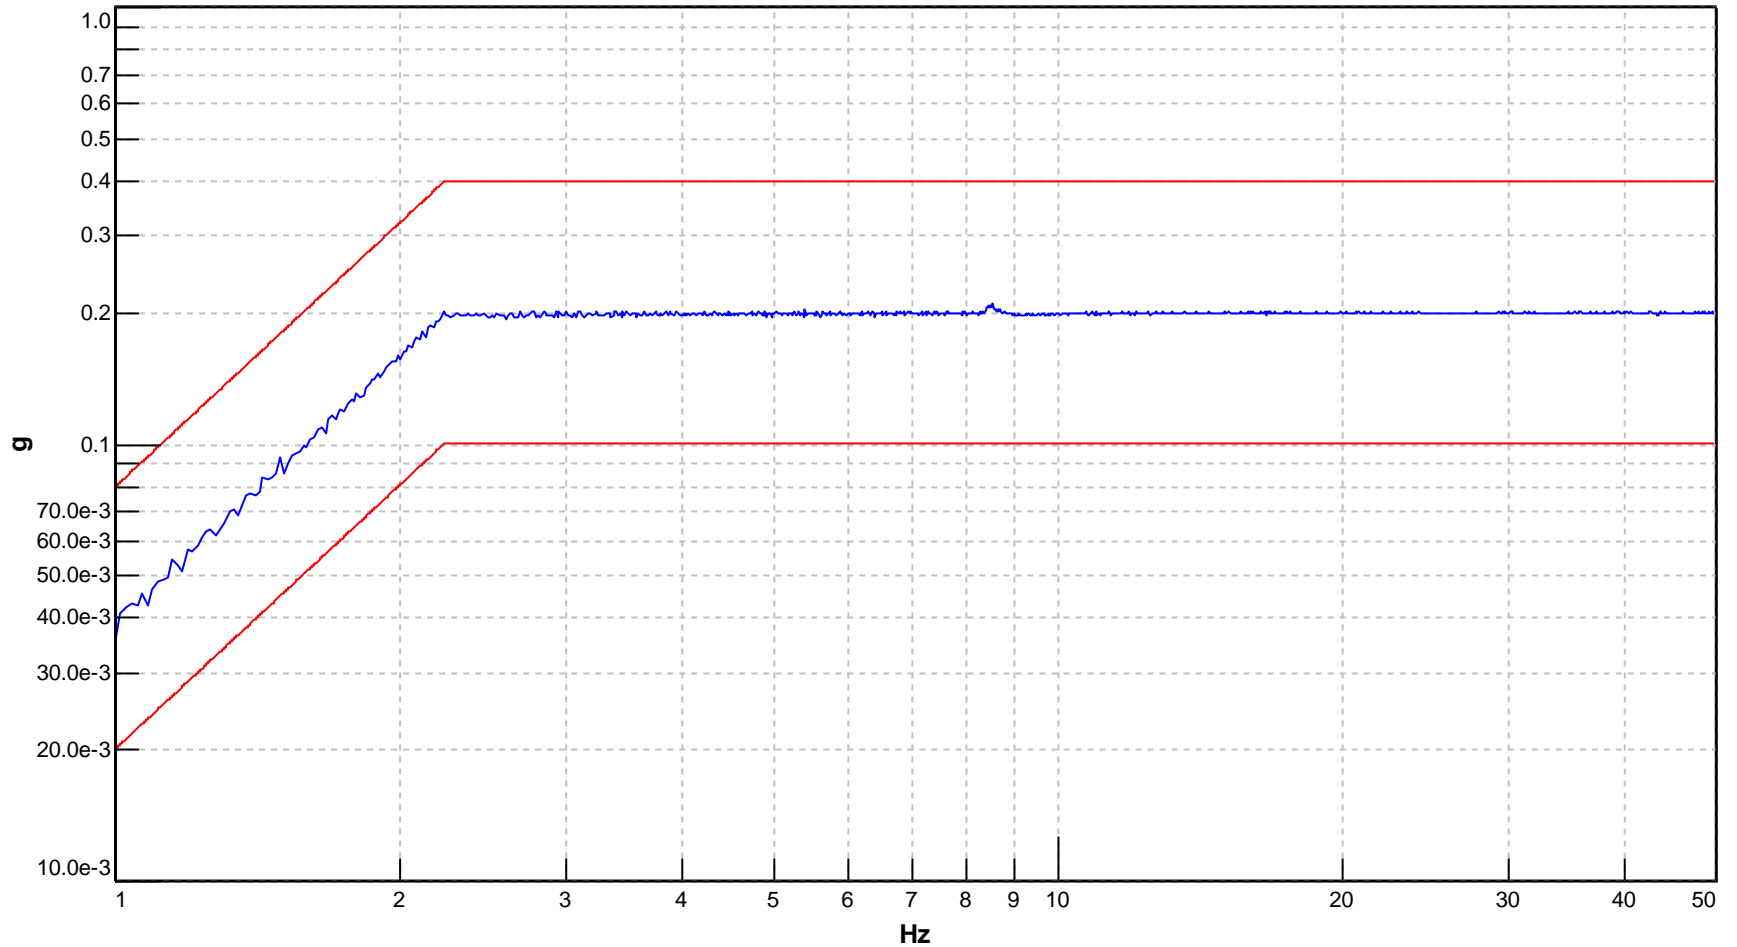

<b>Project:</b> MTL-20-018
<b>Section:</b> X axis
<b>Run:</b> Sine_1
<b>Date:</b> Wed May 06 2020 08:16:36
<b>Point id:</b> MP1
<b>Reference point id:</b> CP1
<b>Sweep rate:</b> 1 Oct/min

Resonance frequency search


- FRF (Harmonic) MP1:+X/CP1:+X
- FRF (Harmonic) MP1:+Y/CP1:+X
- FRF (Harmonic) MP1:+Z/CP1:+X

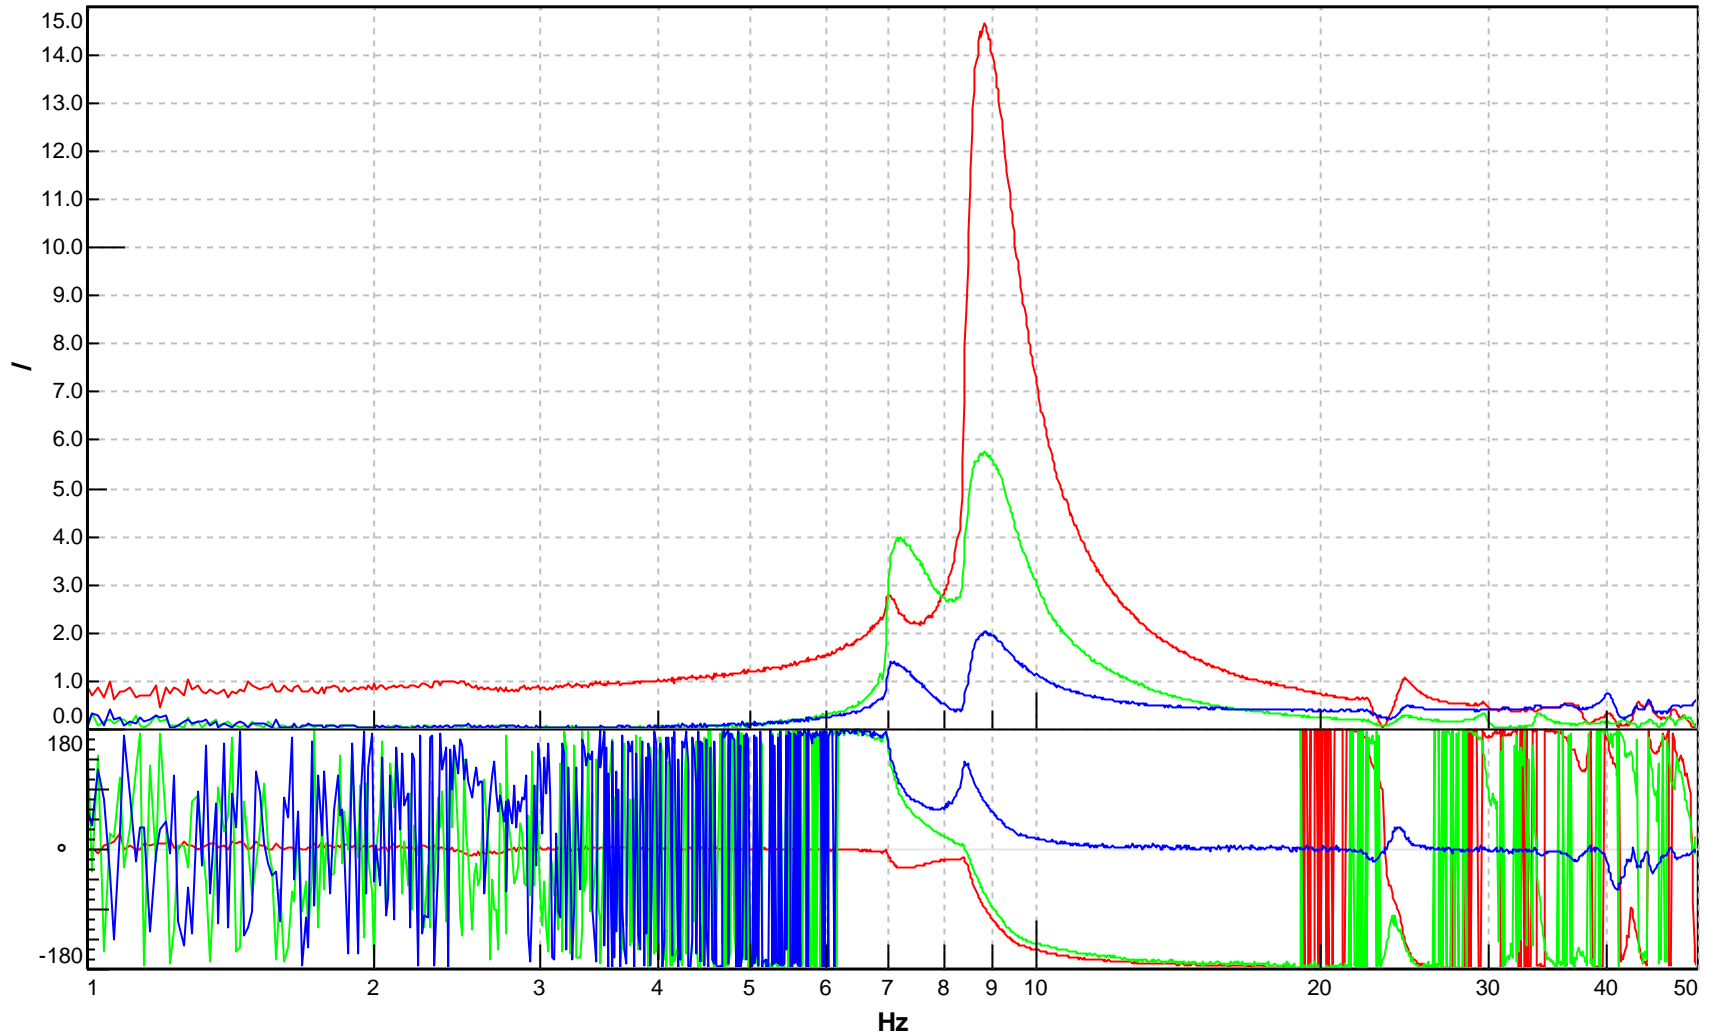



<b>Project:</b> MTL-20-018
<b>Section:</b> X axis
<b>Run:</b> Sine_1
<b>Date:</b> Wed May 06 2020 08:16:36
<b>Point id:</b> MP2
<b>Reference point id:</b> CP1
<b>Sweep rate:</b> 1 Oct/min

Resonance frequency search




- FRF (Harmonic) MP2:+X/CP1:+X
- FRF (Harmonic) MP2:+Y/CP1:+X
- FRF (Harmonic) MP2:+Z/CP1:+X

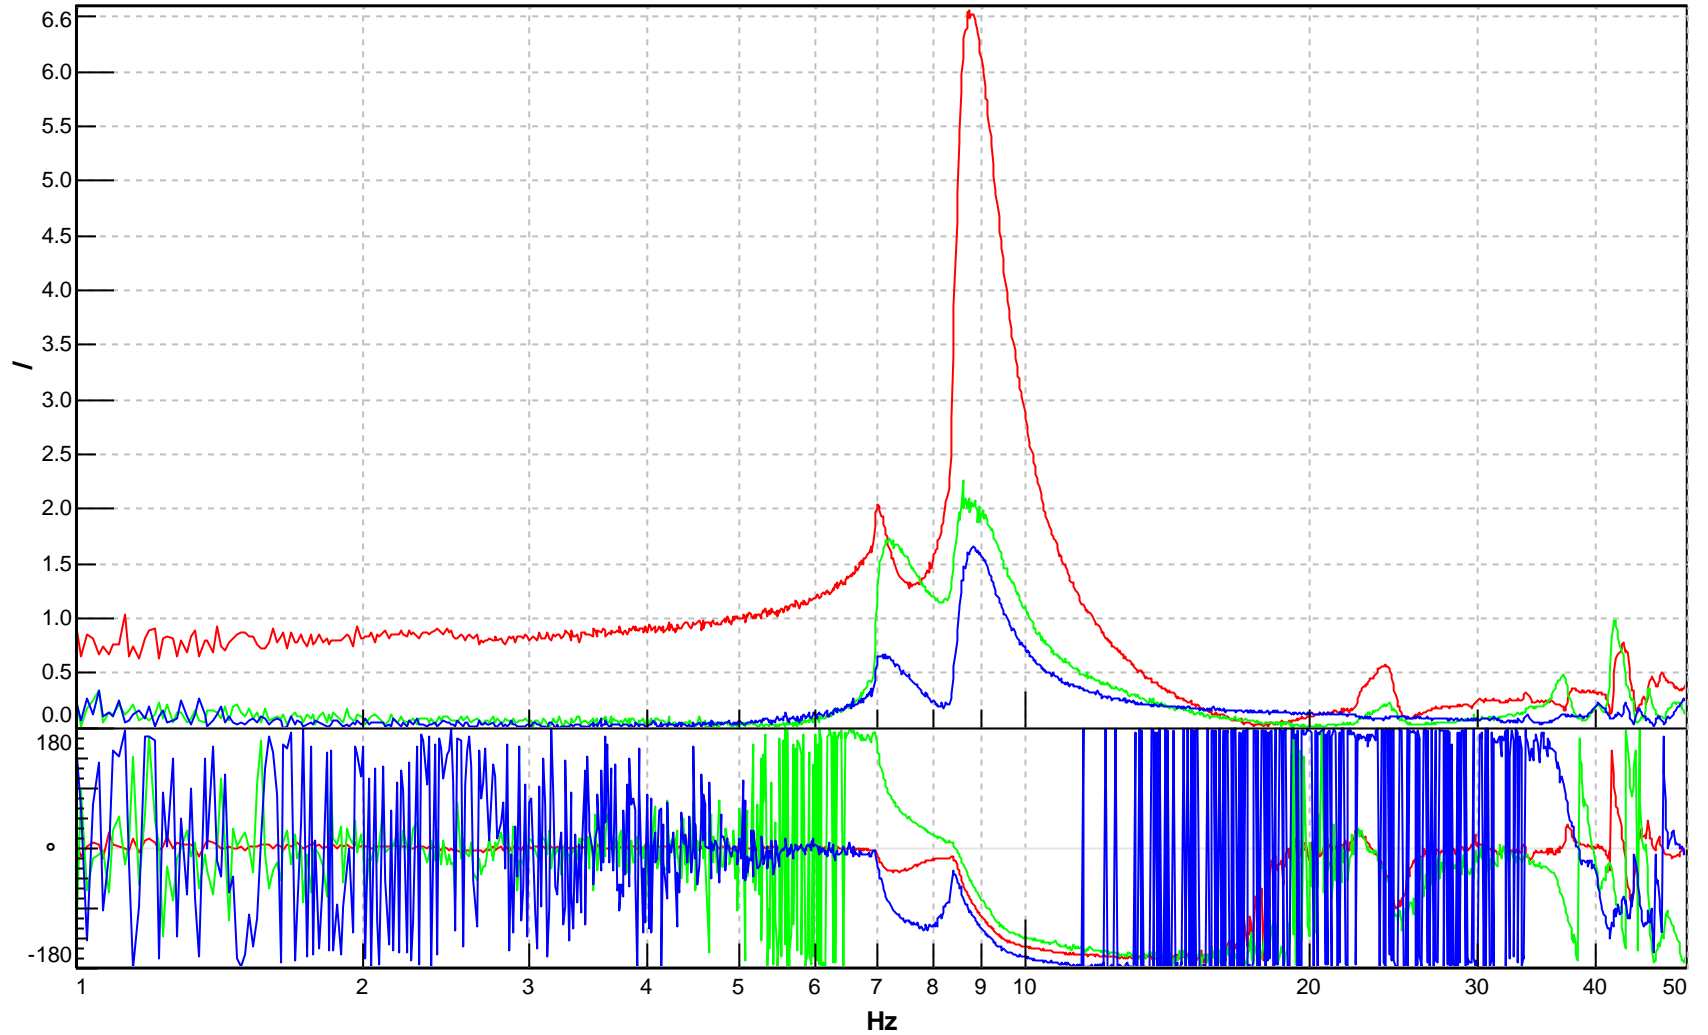




<b>Project:</b> MTL-20-018
<b>Section:</b> X axis
<b>Run:</b> Shock_1
<b>Date:</b> Wed May 06 2020 08:28:37

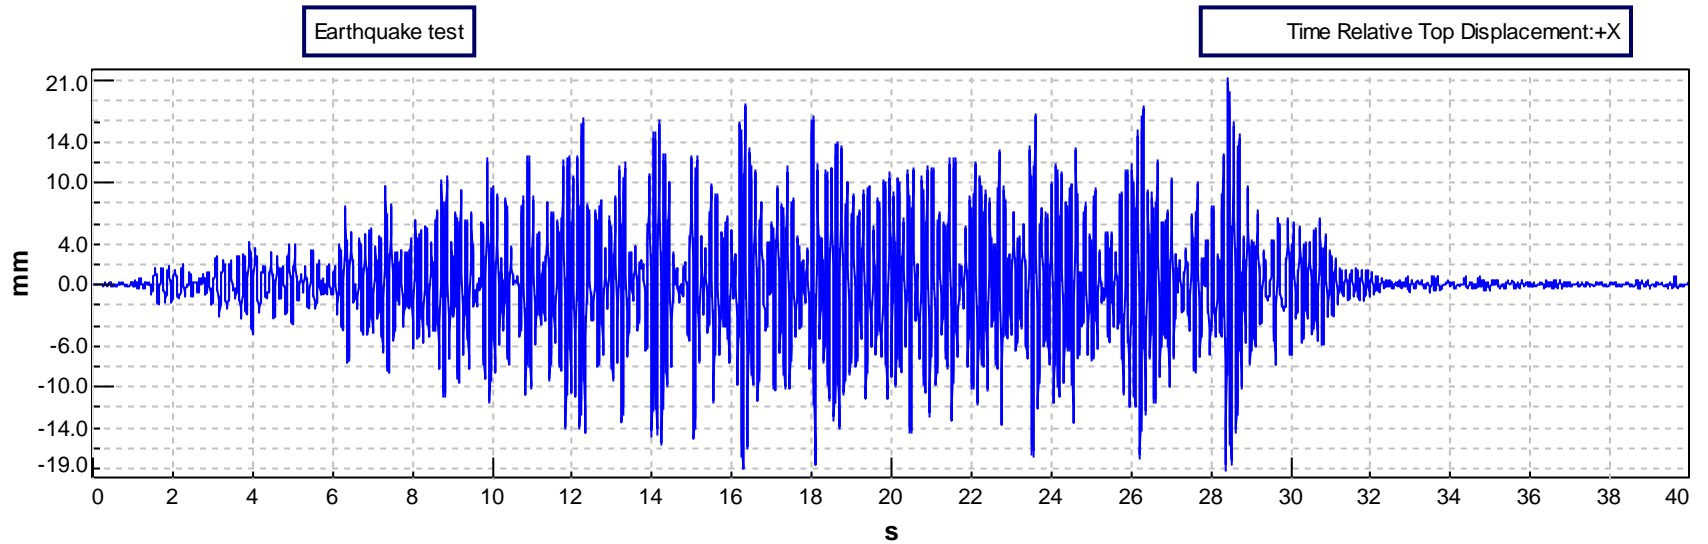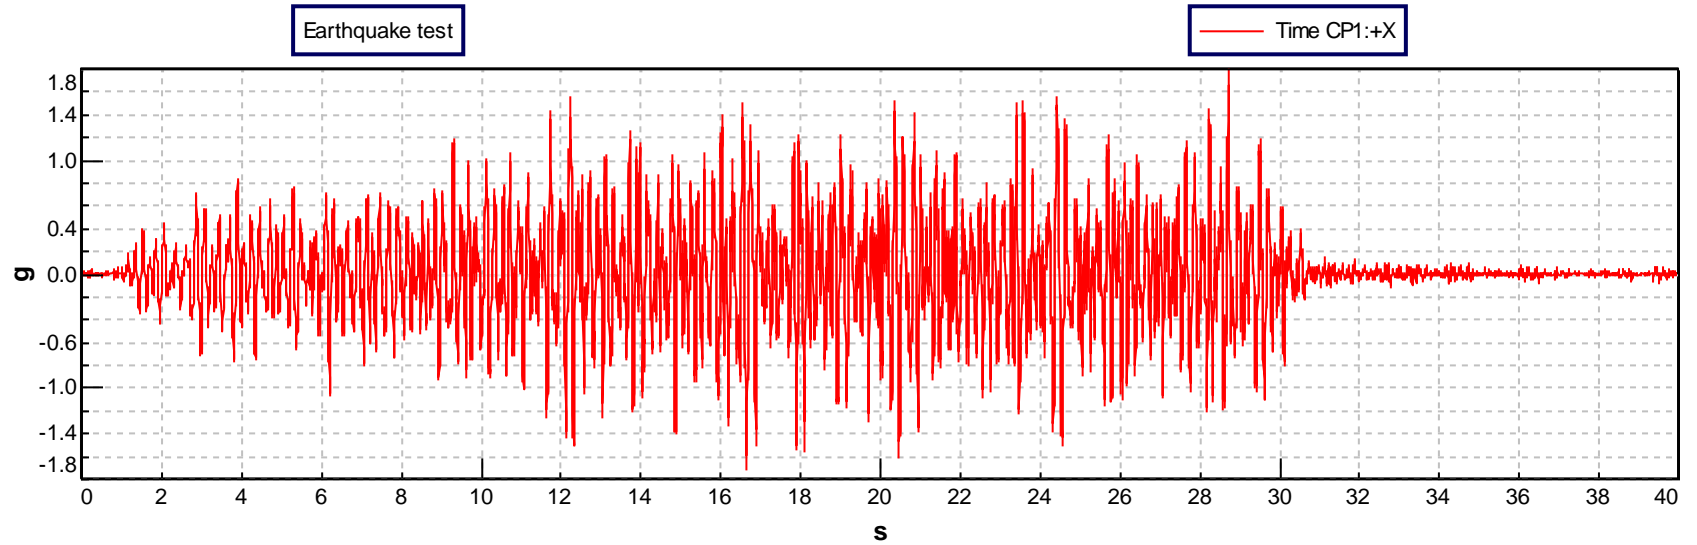

<b>Project:</b> MTL-20-018
<b>Section:</b> X axis
<b>Run:</b> Shock_1
<b>Date:</b> Wed May 06 2020 08:28:37

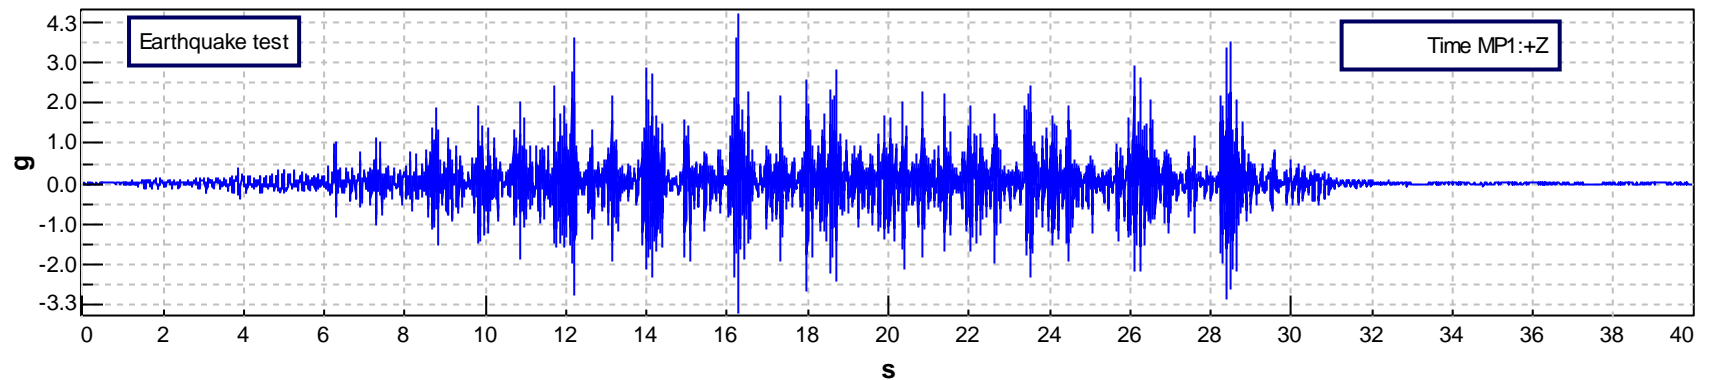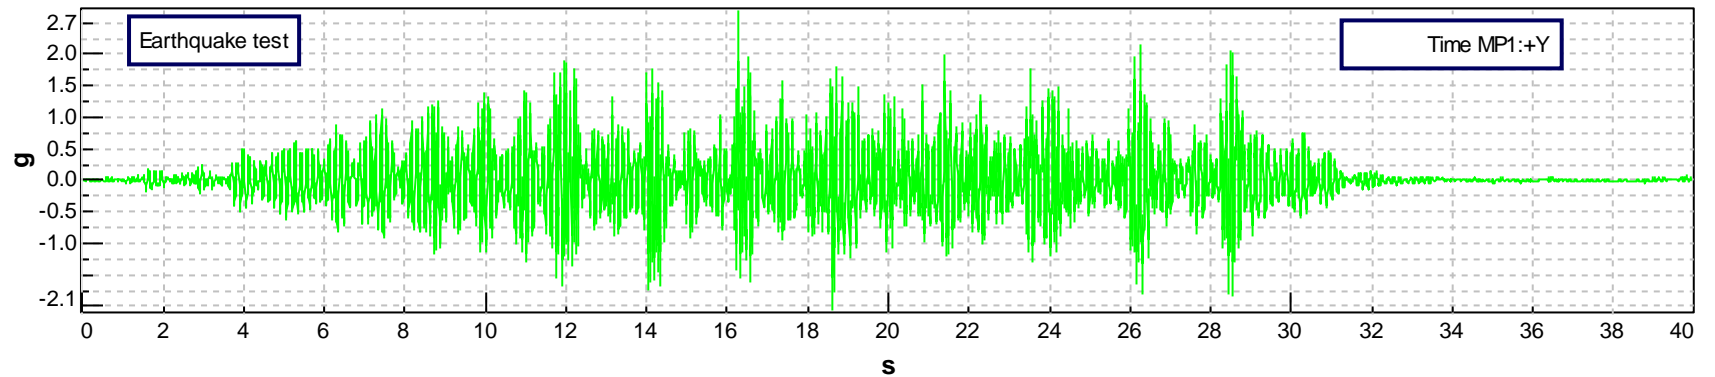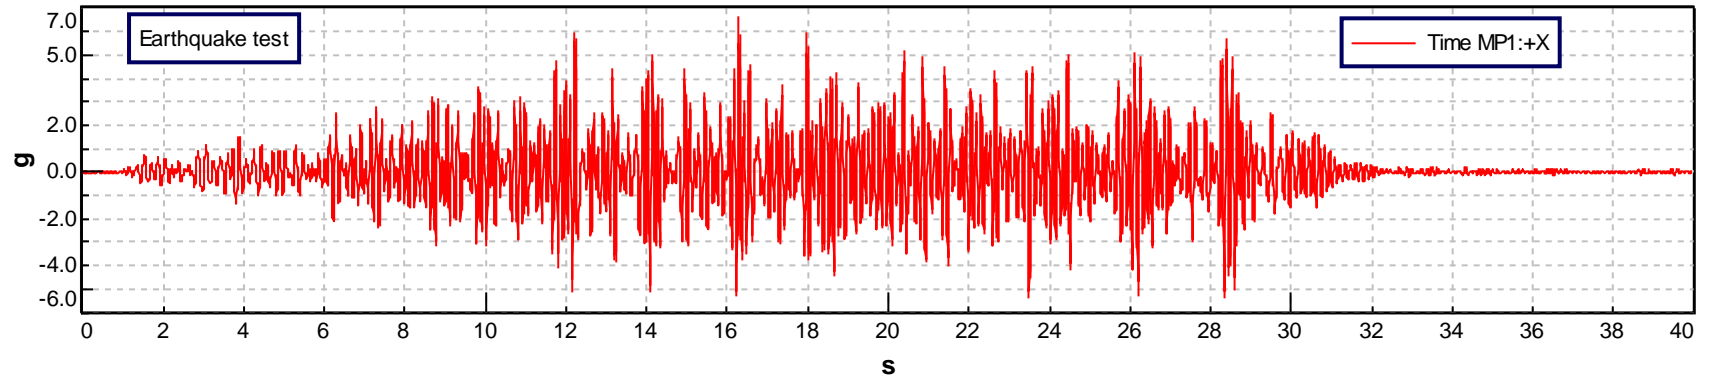


<b>Project:</b> MTL-20-018
<b>Section:</b> X axis
<b>Run:</b> Shock_1
<b>Date:</b> Wed May 06 2020 08:28:37

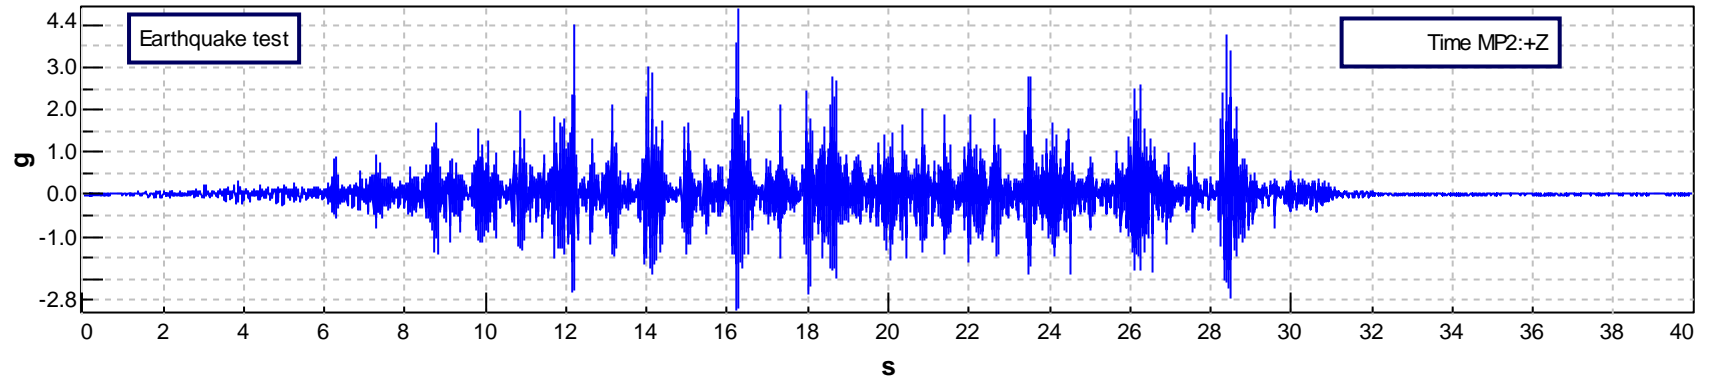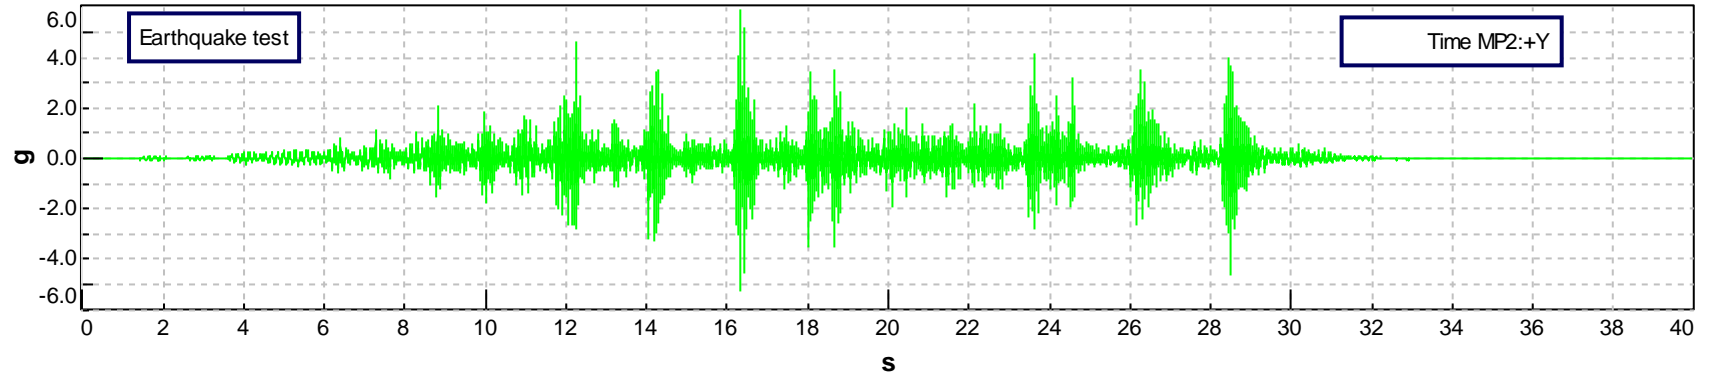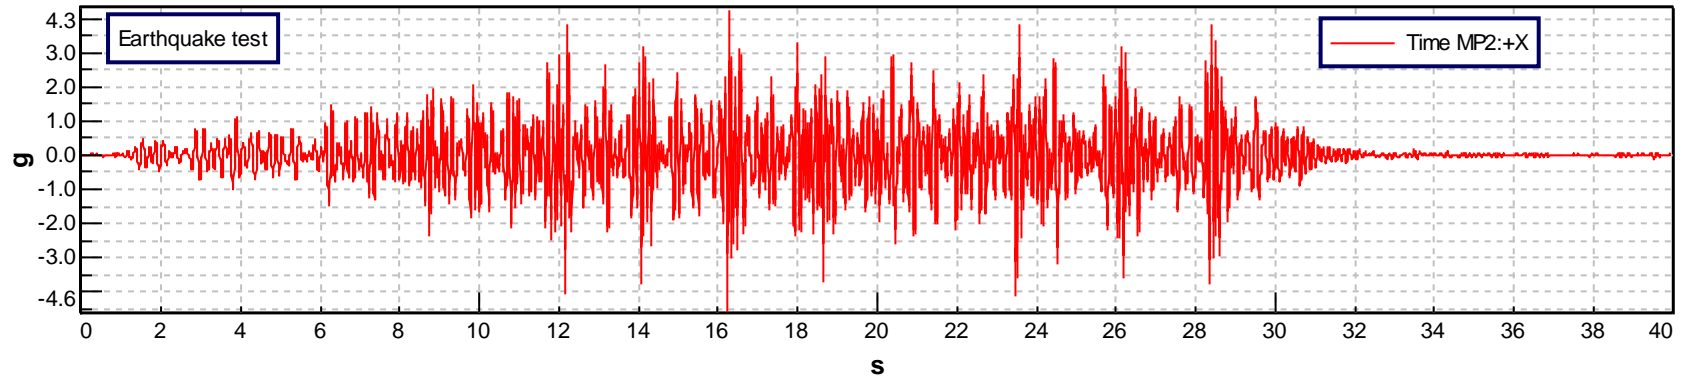

<b>Project:</b> MTL-20-018
<b>Section:</b> X axis
<b>Run:</b> Shock_1
<b>Date:</b> Wed May 06 2020 08:28:37



Earthquake test

— TRS CP1:+X  
- - - Telcordia RRS - Zone 4

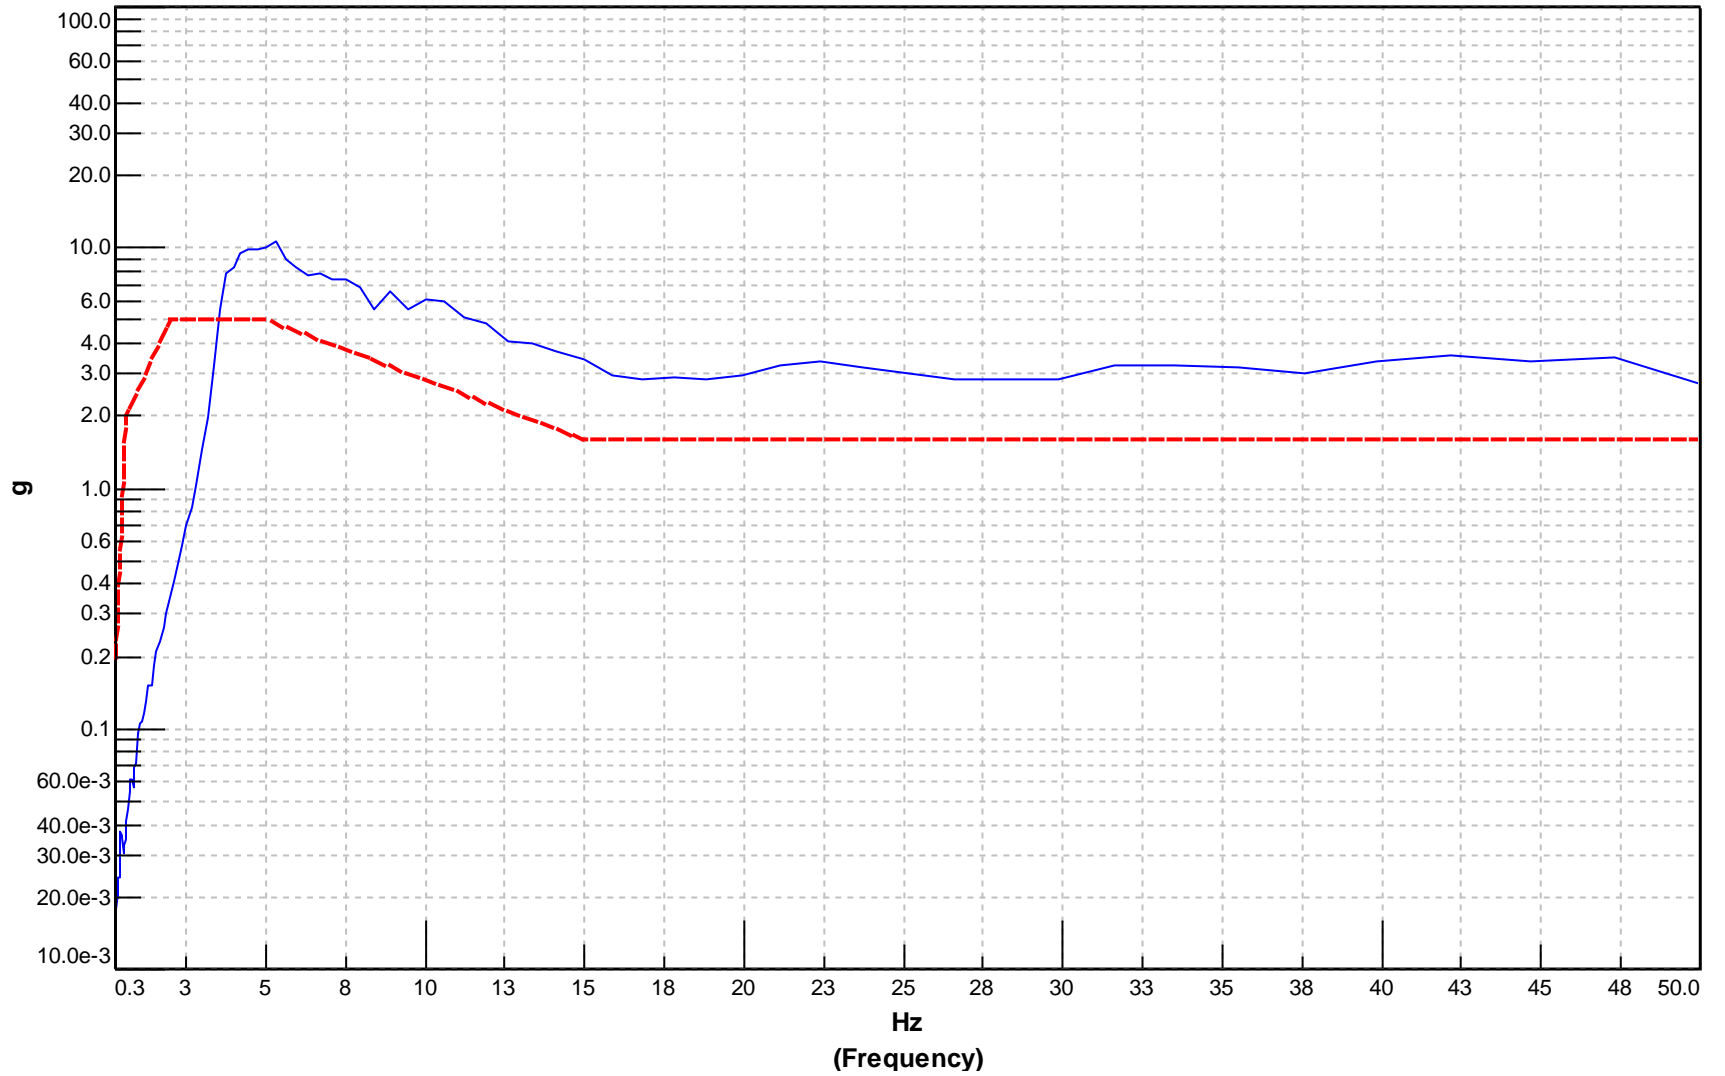

<b>Project:</b> MTL-20-018
<b>Section:</b> X axis
<b>Run:</b> Sine_2
<b>Date:</b> Wed May 06 2020 09:02:18
<b>Point id:</b> AvgCtrl
<b>No. control channels:</b> 1
<b>Control strategy:</b> Average
<b>Sweep rate:</b> 1 Oct/min


Resonance frequency search

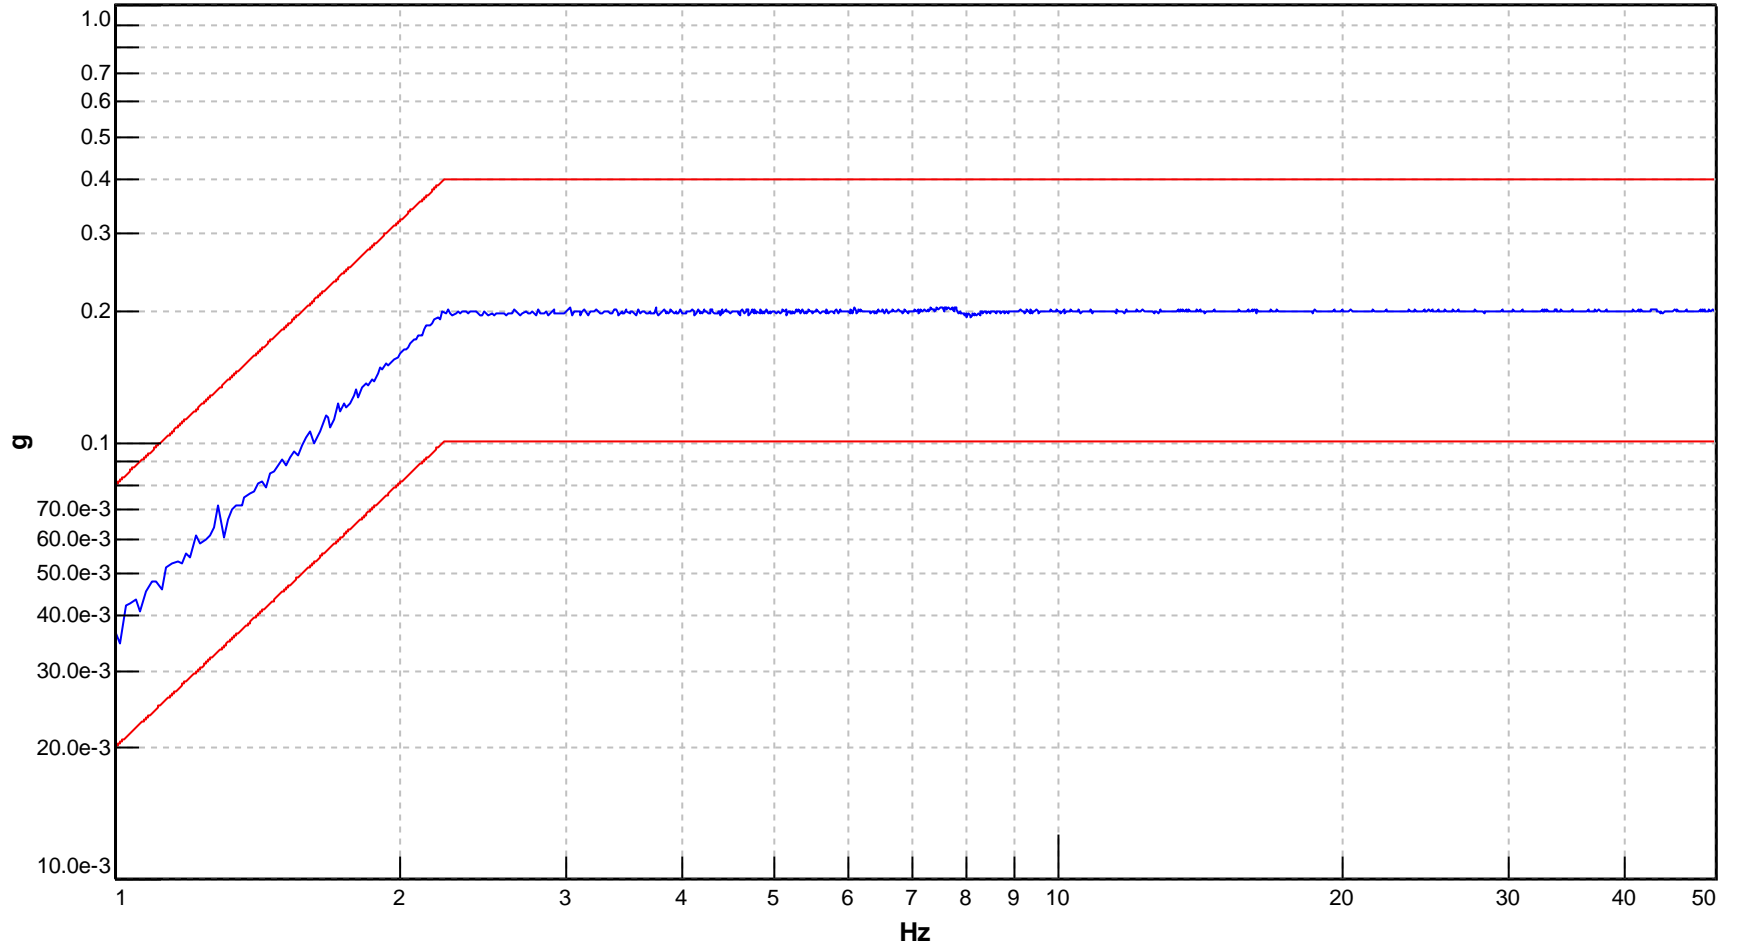

<b>Project:</b> MTL-20-018
<b>Section:</b> X axis
<b>Run:</b> Sine_2
<b>Date:</b> Wed May 06 2020 09:02:18
<b>Point id:</b> MP1
<b>Reference point id:</b> CP1
<b>Sweep rate:</b> 1 Oct/min

Resonance frequency search


- FRF (Harmonic) MP1:+X/CP1:+X
- FRF (Harmonic) MP1:+Y/CP1:+X
- FRF (Harmonic) MP1:+Z/CP1:+X

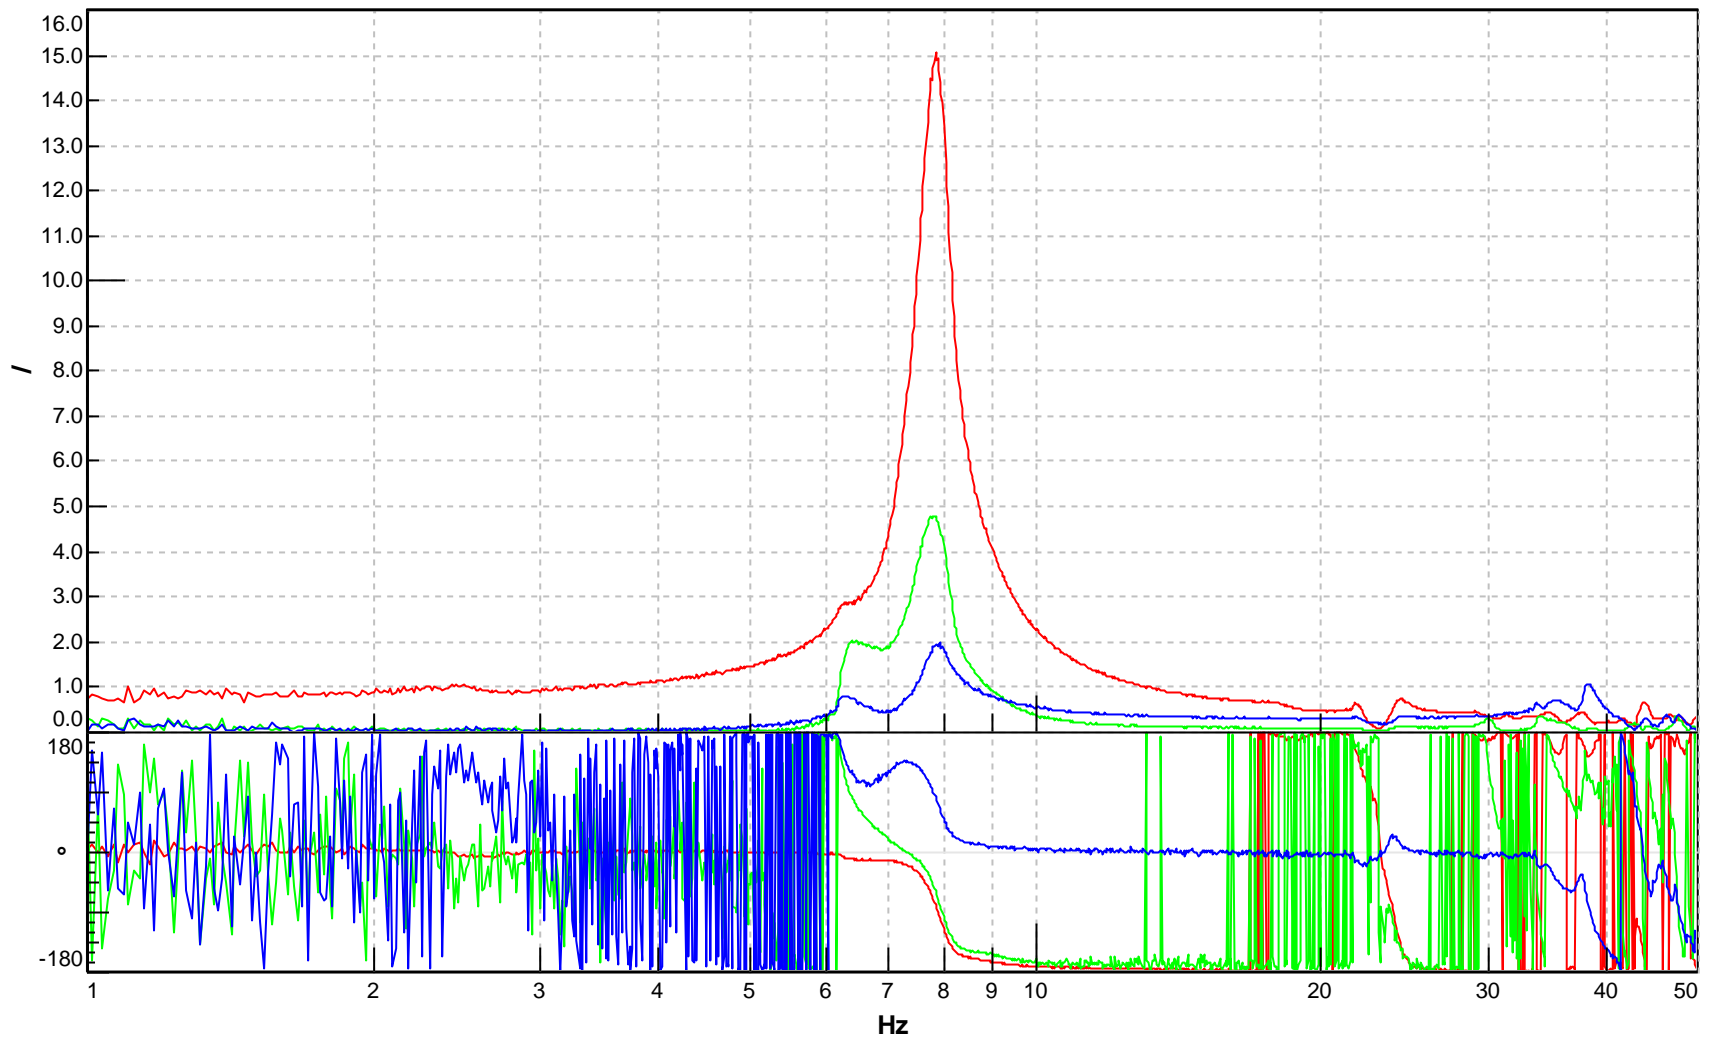

<b>Project:</b> MTL-20-018
<b>Section:</b> X axis
<b>Run:</b> Sine_2
<b>Date:</b> Wed May 06 2020 09:02:18
<b>Point id:</b> MP2
<b>Reference point id:</b> CP1
<b>Sweep rate:</b> 1 Oct/min



Resonance frequency search

- FRF (Harmonic) MP2:+X/CP1:+X
- FRF (Harmonic) MP2:+Y/CP1:+X
- FRF (Harmonic) MP2:+Z/CP1:+X

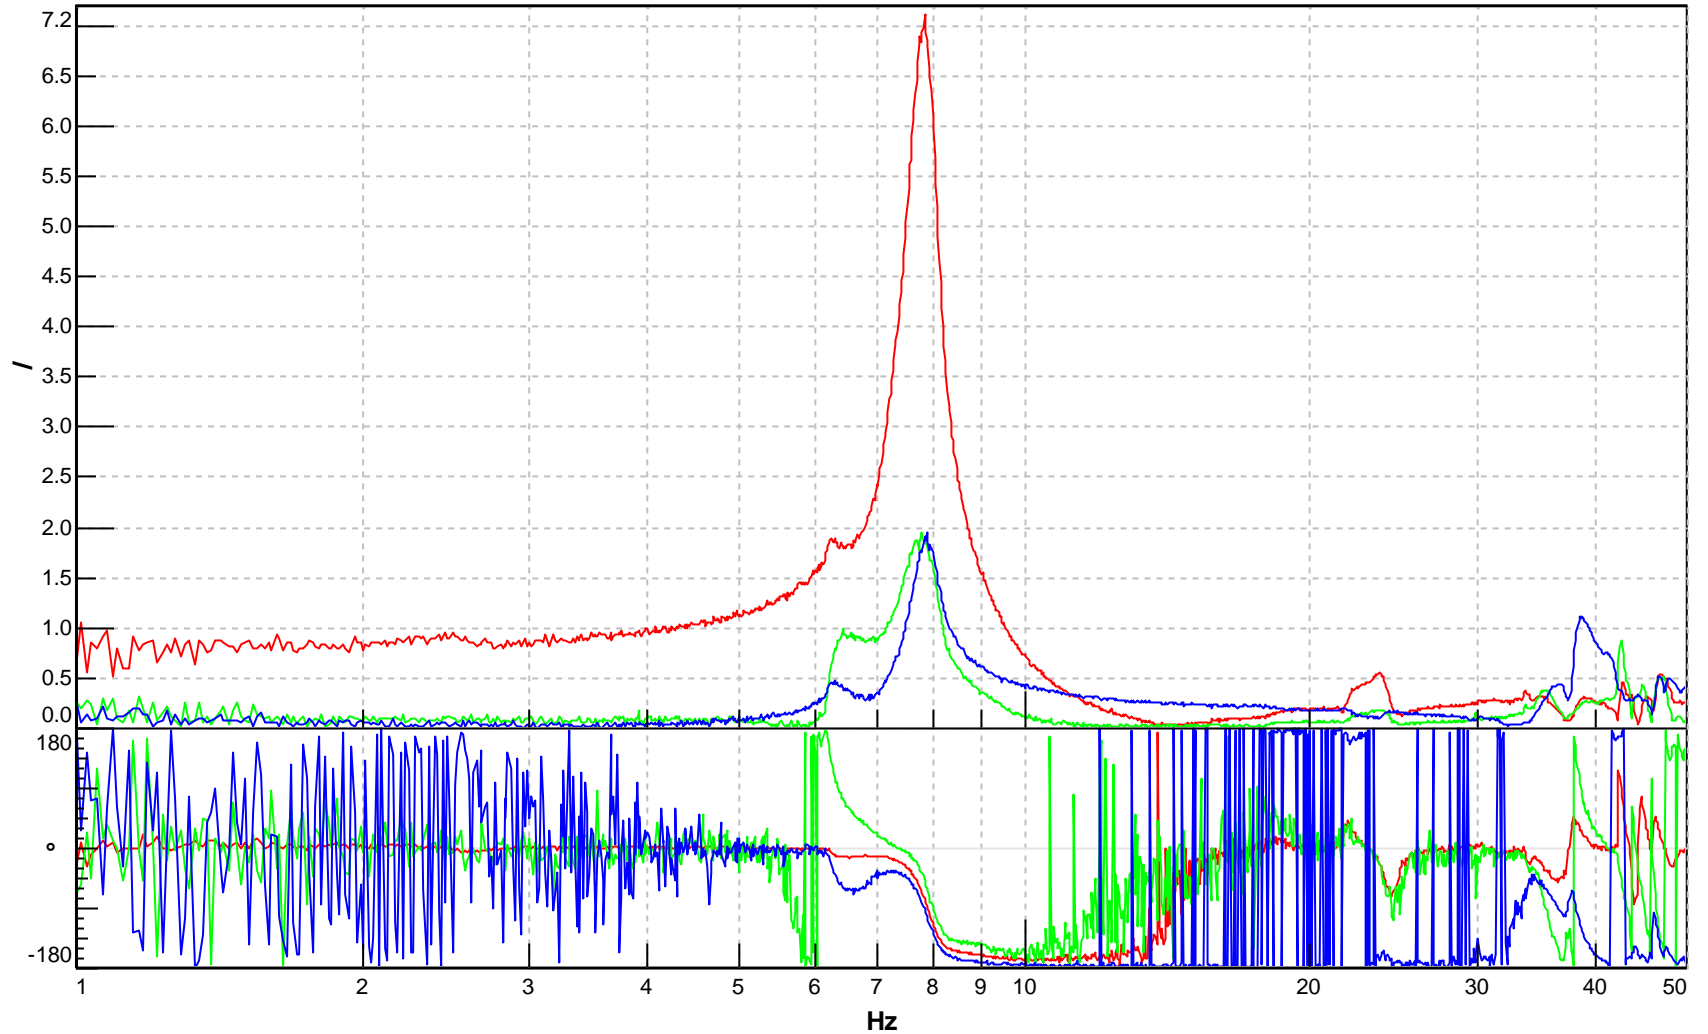

<b>Project:</b> MTL-20-018
<b>Section:</b> Y axis
<b>Run:</b> Sine_1
<b>Date:</b> Wed May 06 2020 09:26:15
<b>Point id:</b> AvgCtrl
<b>No. control channels:</b> 1
<b>Control strategy:</b> Average
<b>Sweep rate:</b> 1 Oct/min


Resonance frequency search

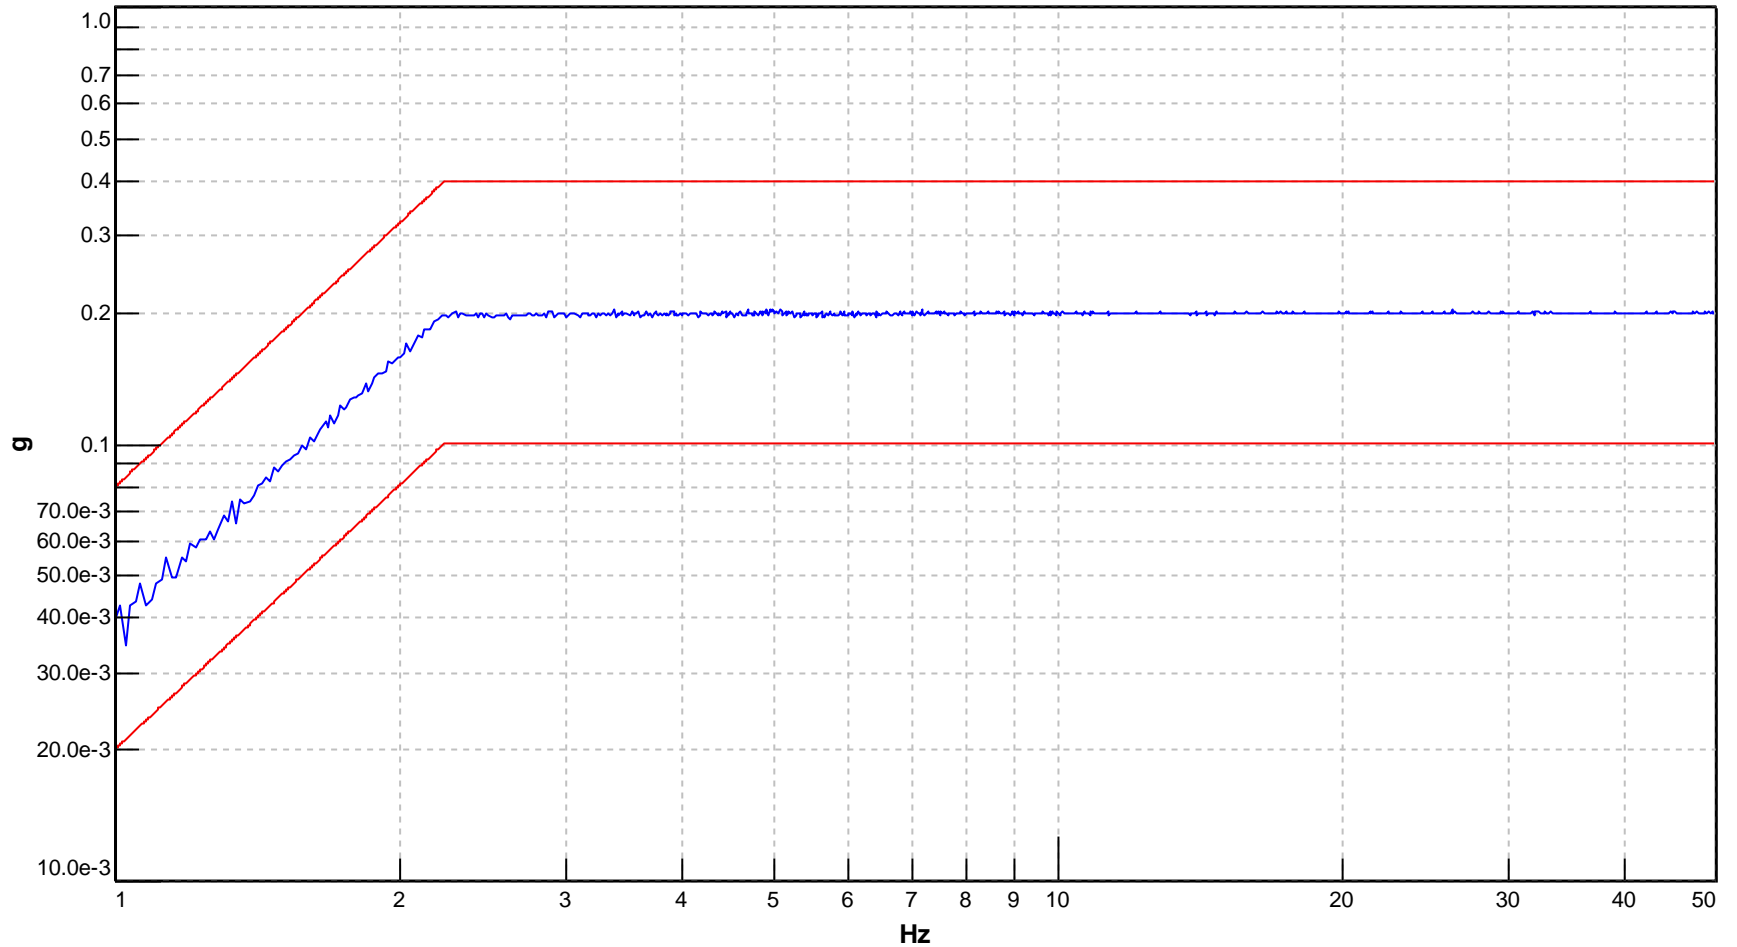

<b>Project:</b> MTL-20-018
<b>Section:</b> Y axis
<b>Run:</b> Sine_1
<b>Date:</b> Wed May 06 2020 09:26:15
<b>Point id:</b> MP1
<b>Reference point id:</b> CP1
<b>Sweep rate:</b> 1 Oct/min

Resonance frequency search


- FRF (Harmonic) MP1:+X/CP1:+Y
- FRF (Harmonic) MP1:+Y/CP1:+Y
- FRF (Harmonic) MP1:+Z/CP1:+Y

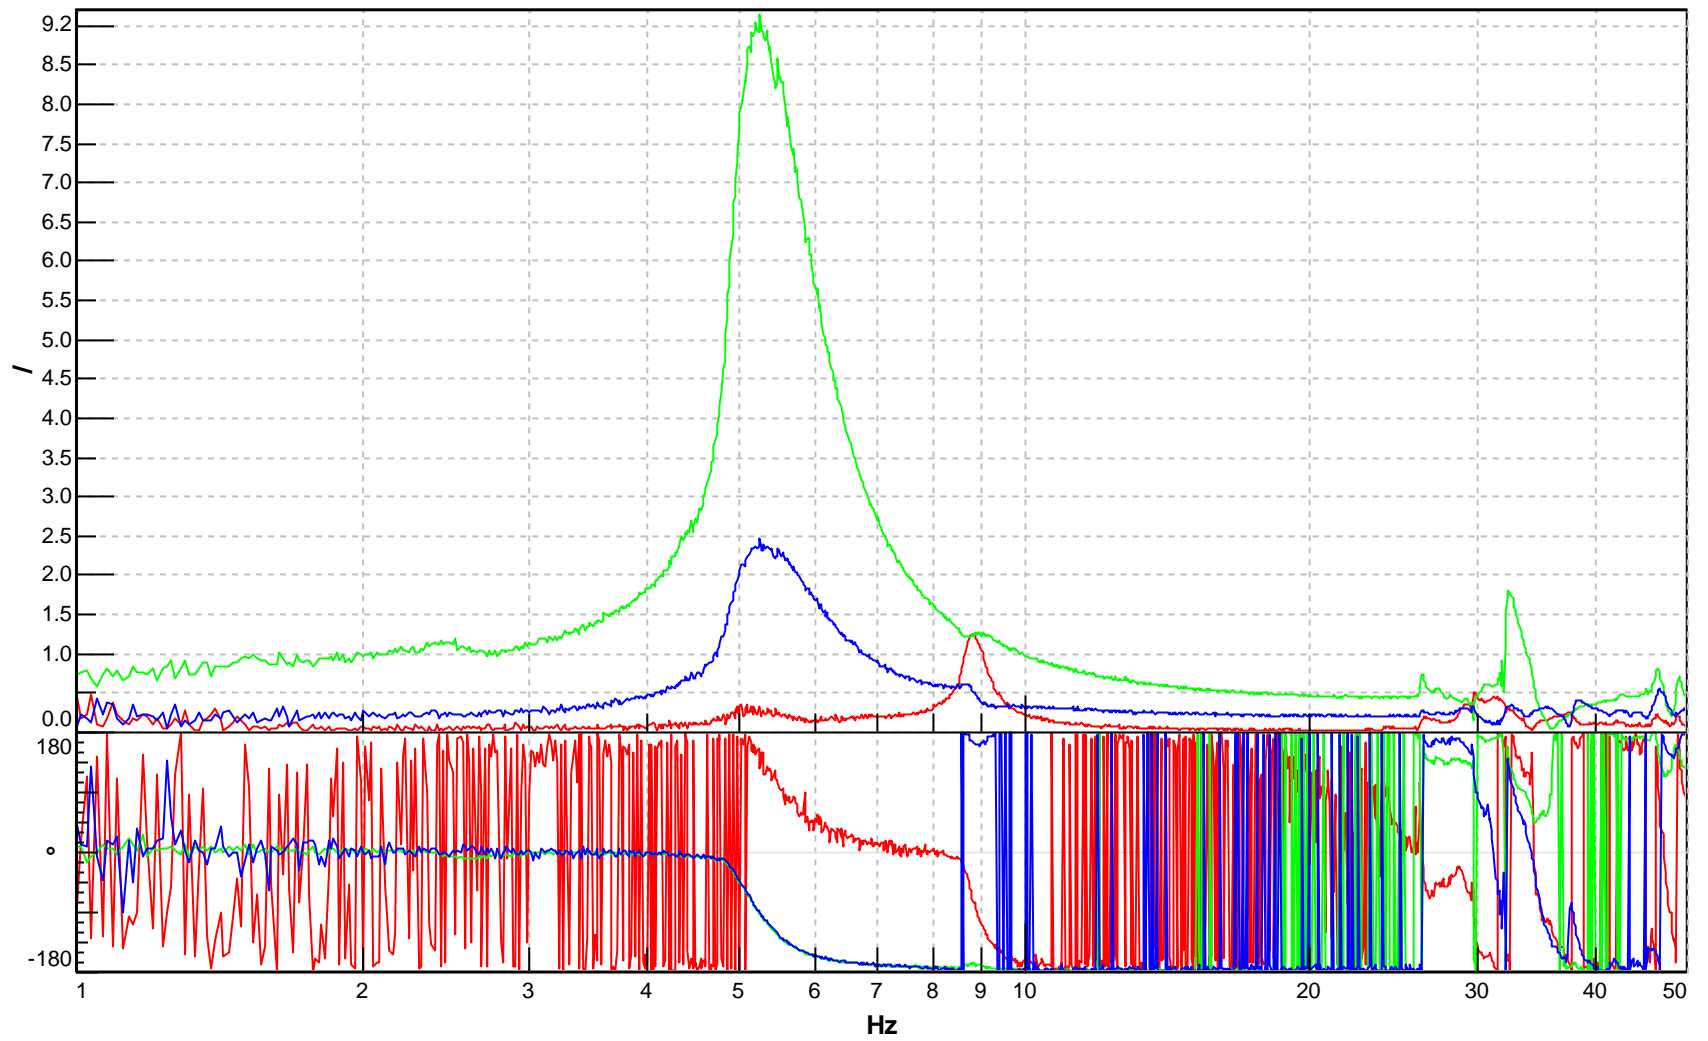



<b>Project:</b> MTL-20-018
<b>Section:</b> Y axis
<b>Run:</b> Sine_1
<b>Date:</b> Wed May 06 2020 09:26:15
<b>Point id:</b> MP2
<b>Reference point id:</b> CP1
<b>Sweep rate:</b> 1 Oct/min

Resonance frequency search



- FRF (Harmonic) MP2:+X/CP1:+Y
- FRF (Harmonic) MP2:+Y/CP1:+Y
- FRF (Harmonic) MP2:+Z/CP1:+Y

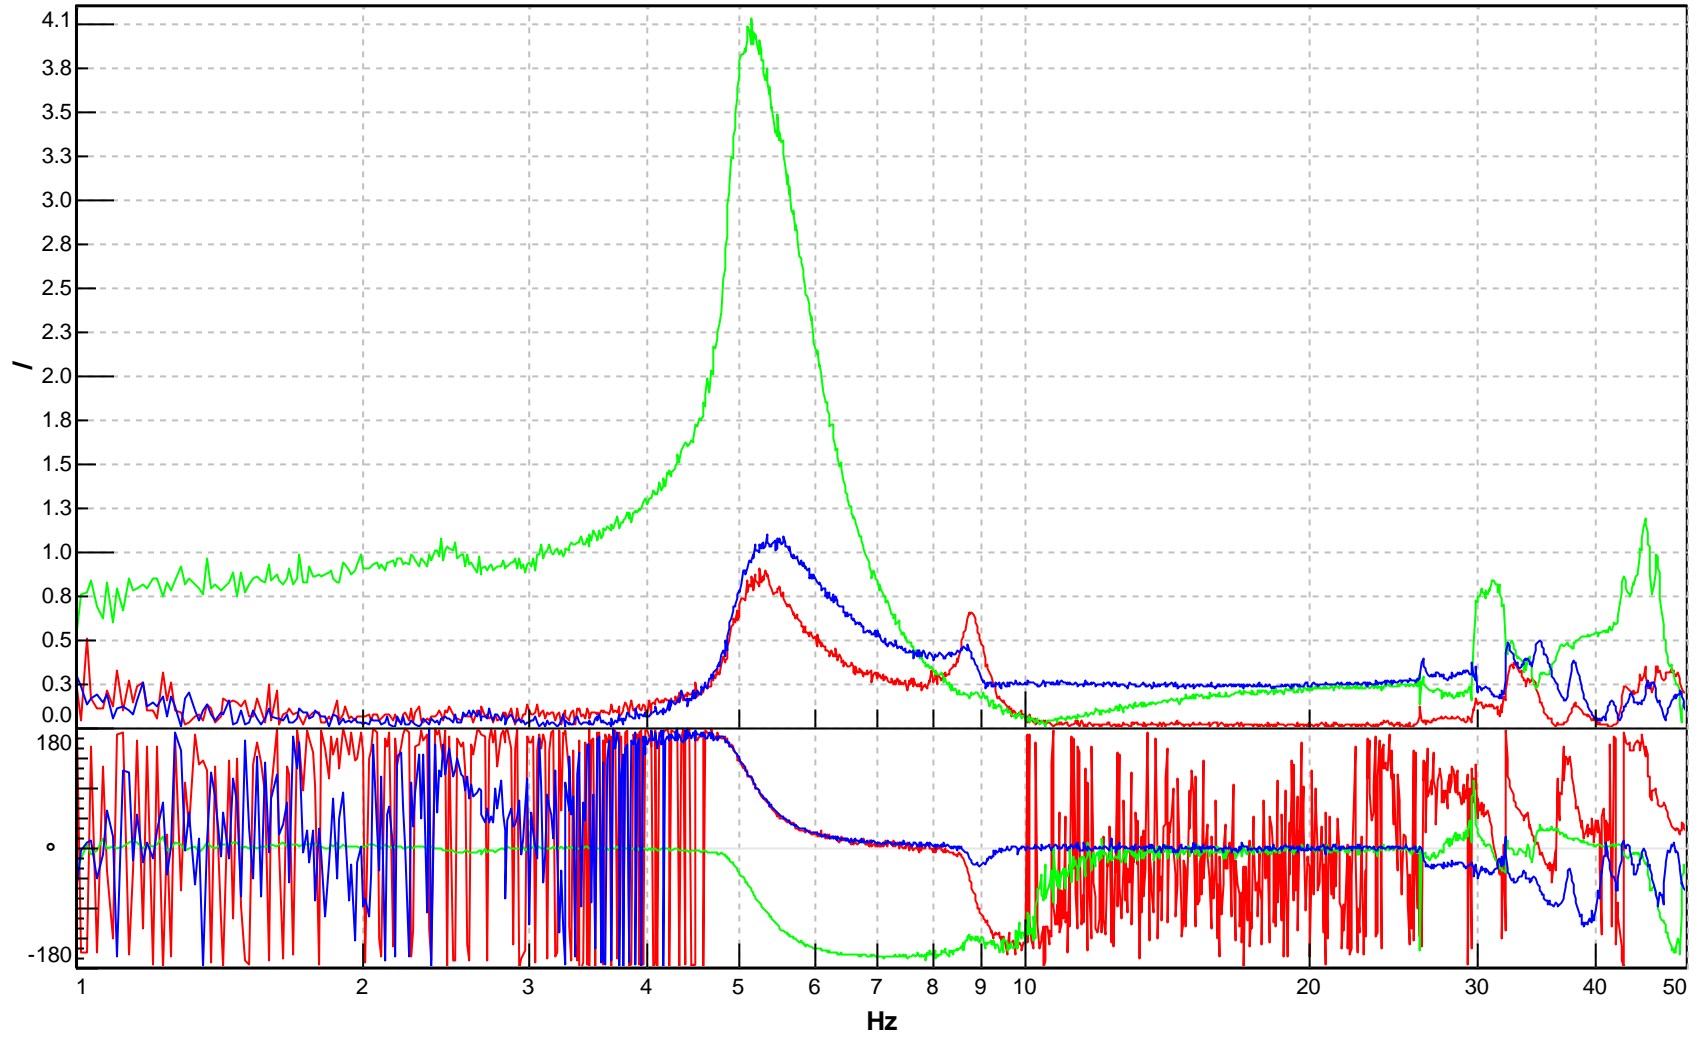




<b>Project:</b> MTL-20-018
<b>Section:</b> Y axis
<b>Run:</b> Shock_1
<b>Date:</b> Wed May 06 2020 09:36:21

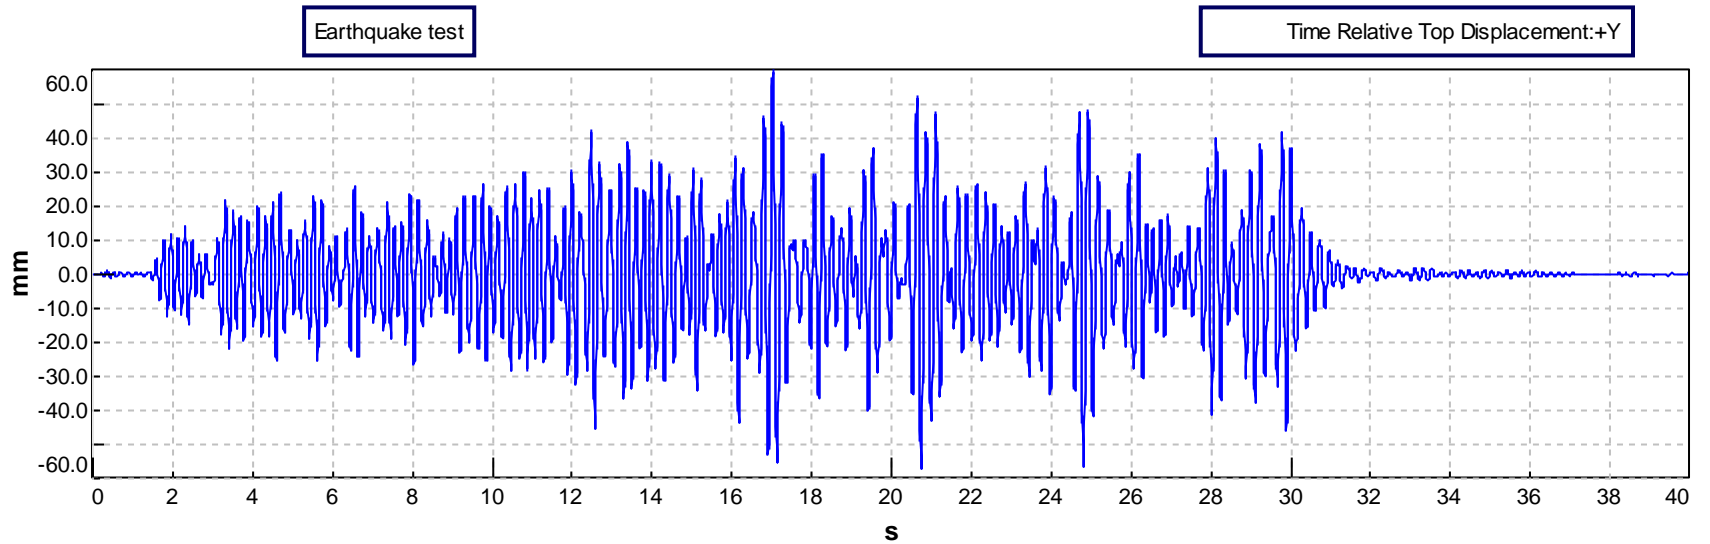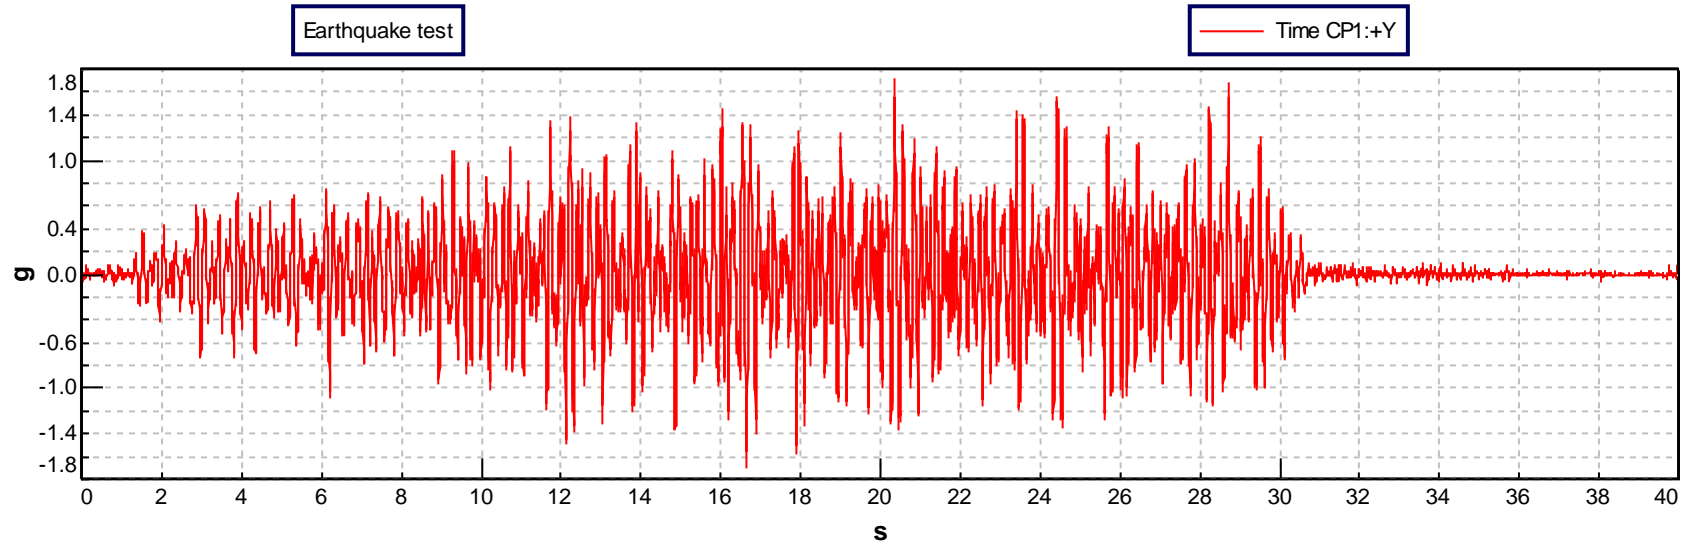

<b>Project:</b> MTL-20-018
<b>Section:</b> Y axis
<b>Run:</b> Shock_1
<b>Date:</b> Wed May 06 2020 09:36:21

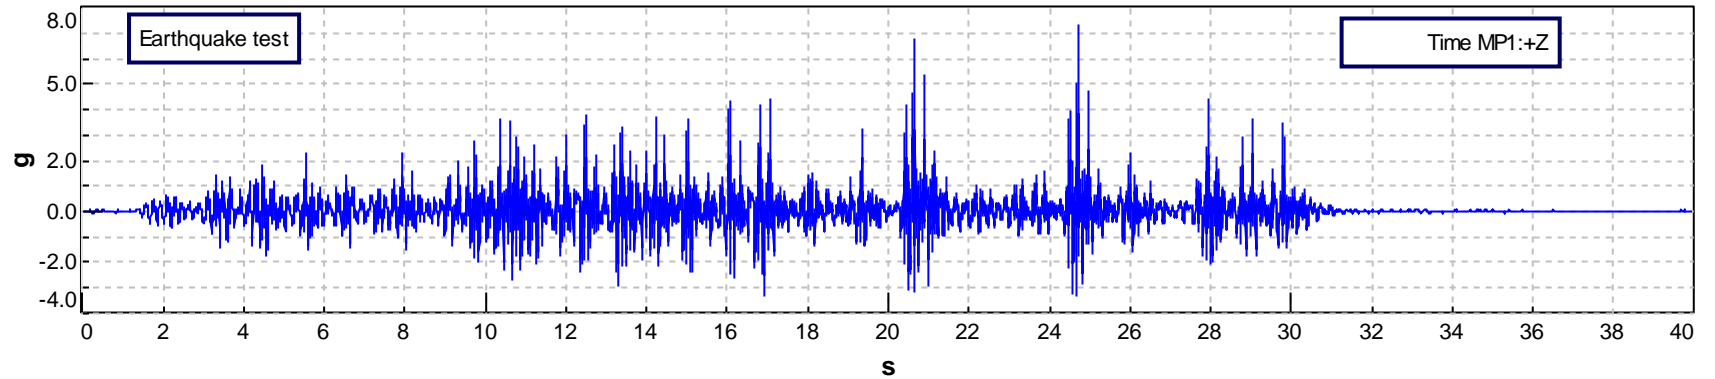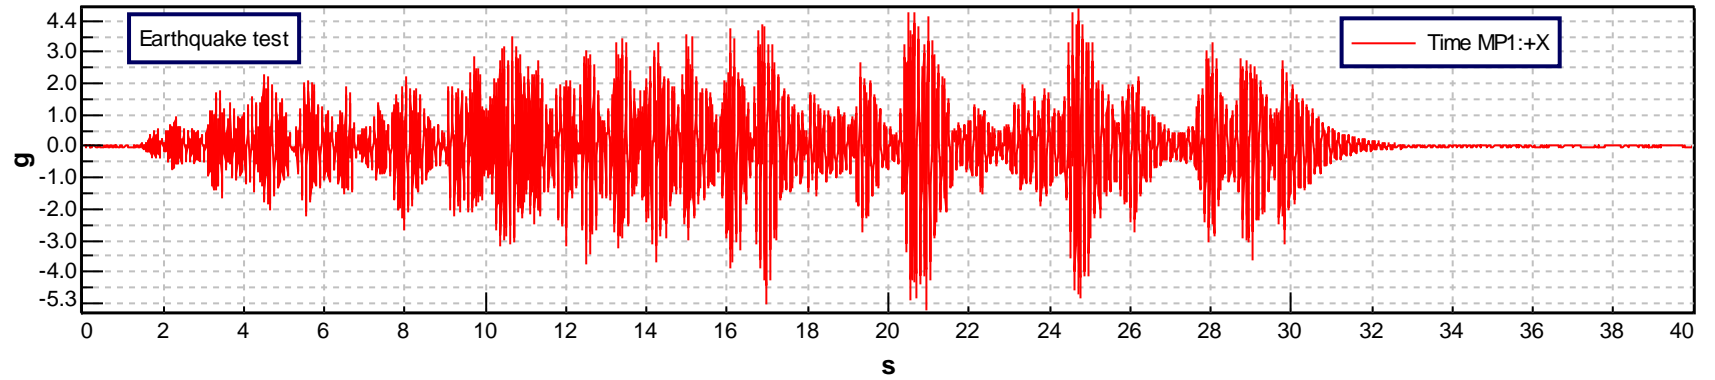


<b>Project:</b> MTL-20-018
<b>Section:</b> Y axis
<b>Run:</b> Shock_1
<b>Date:</b> Wed May 06 2020 09:36:21

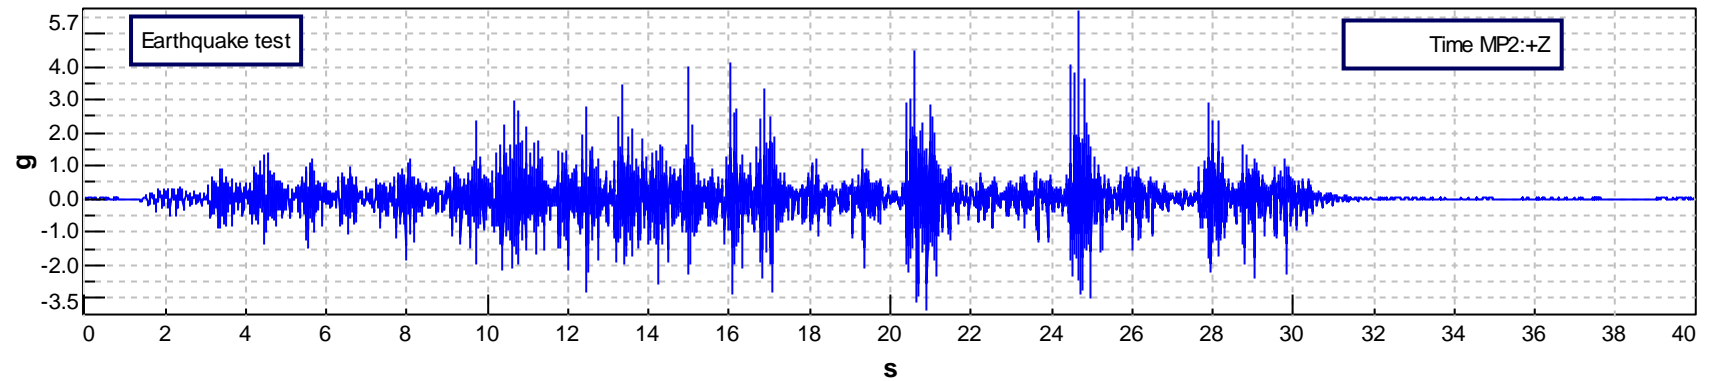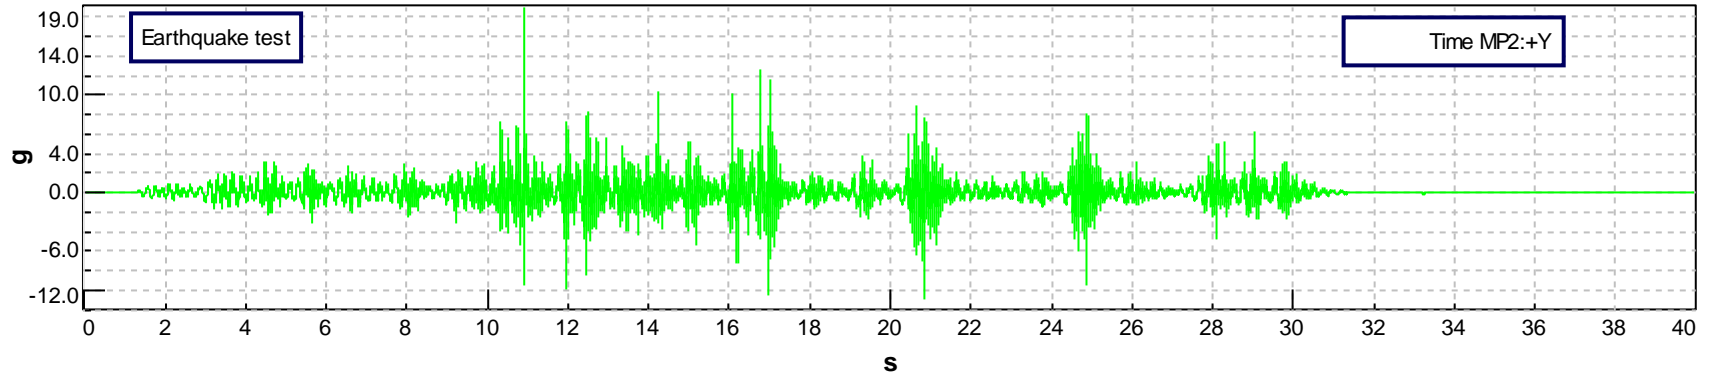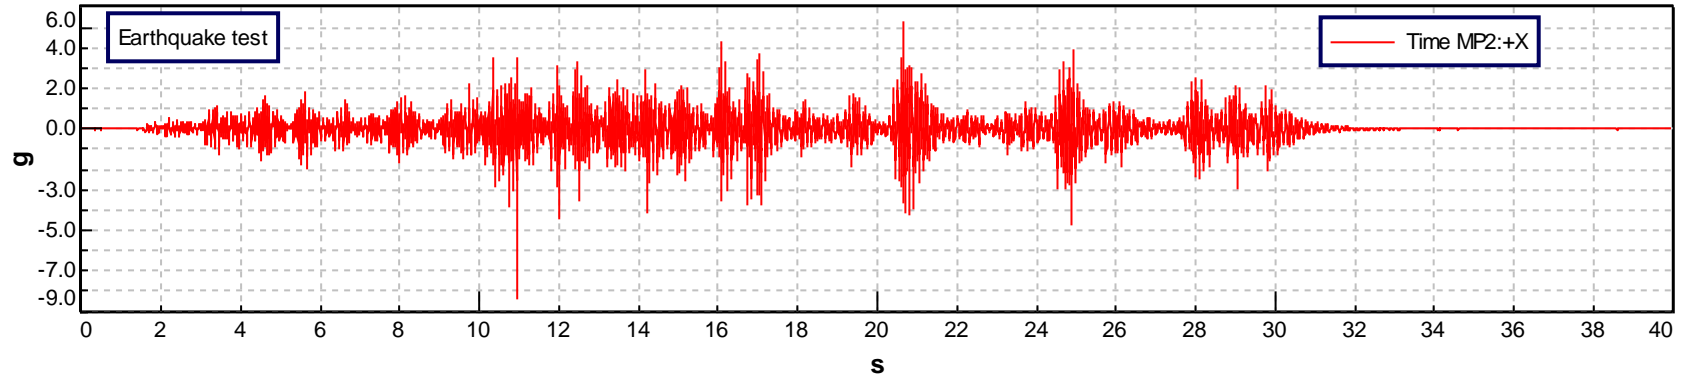

<b>Project:</b> MTL-20-018
<b>Section:</b> Y axis
<b>Run:</b> Shock_1
<b>Date:</b> Wed May 06 2020 09:36:21



Earthquake test

— TRS CP1:+Y  
- - - Telcordia RRS - Zone 4

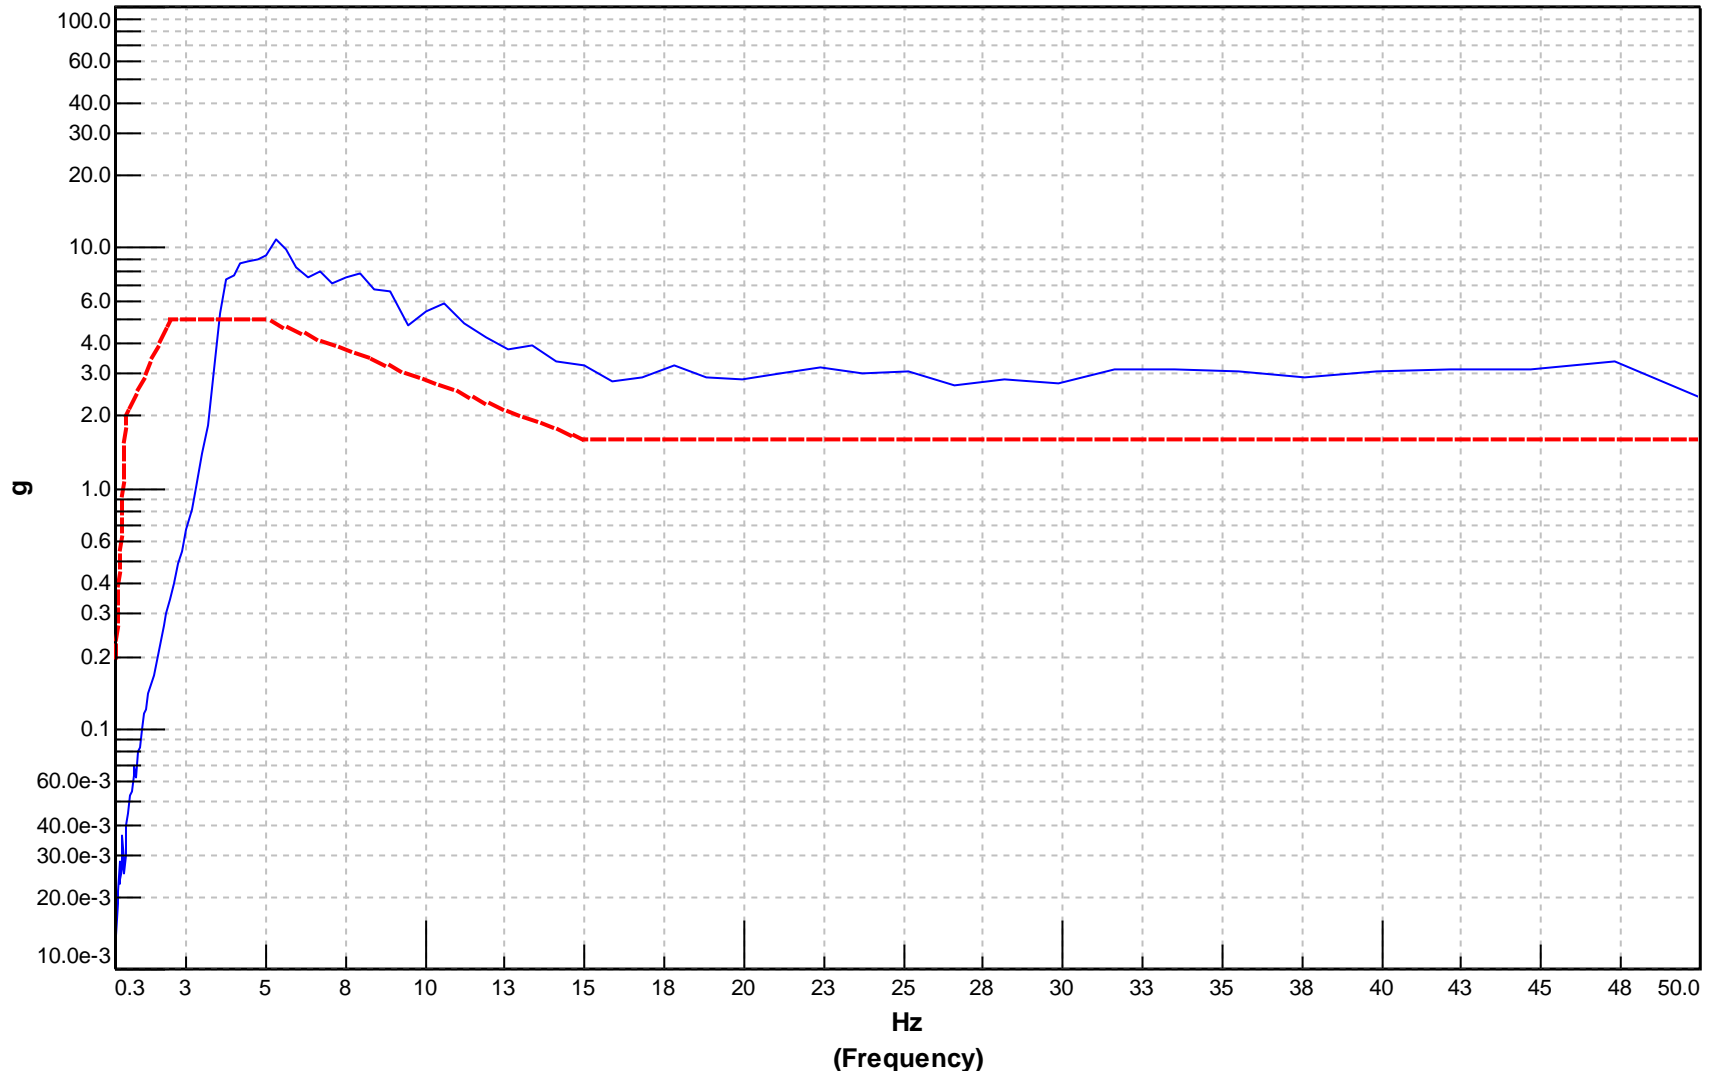

<b>Project:</b> MTL-20-018
<b>Section:</b> Y axis
<b>Run:</b> Sine_2
<b>Date:</b> Wed May 06 2020 10:12:12
<b>Point id:</b> AvgCtrl
<b>No. control channels:</b> 1
<b>Control strategy:</b> Average
<b>Sweep rate:</b> 1 Oct/min


Resonance frequency search

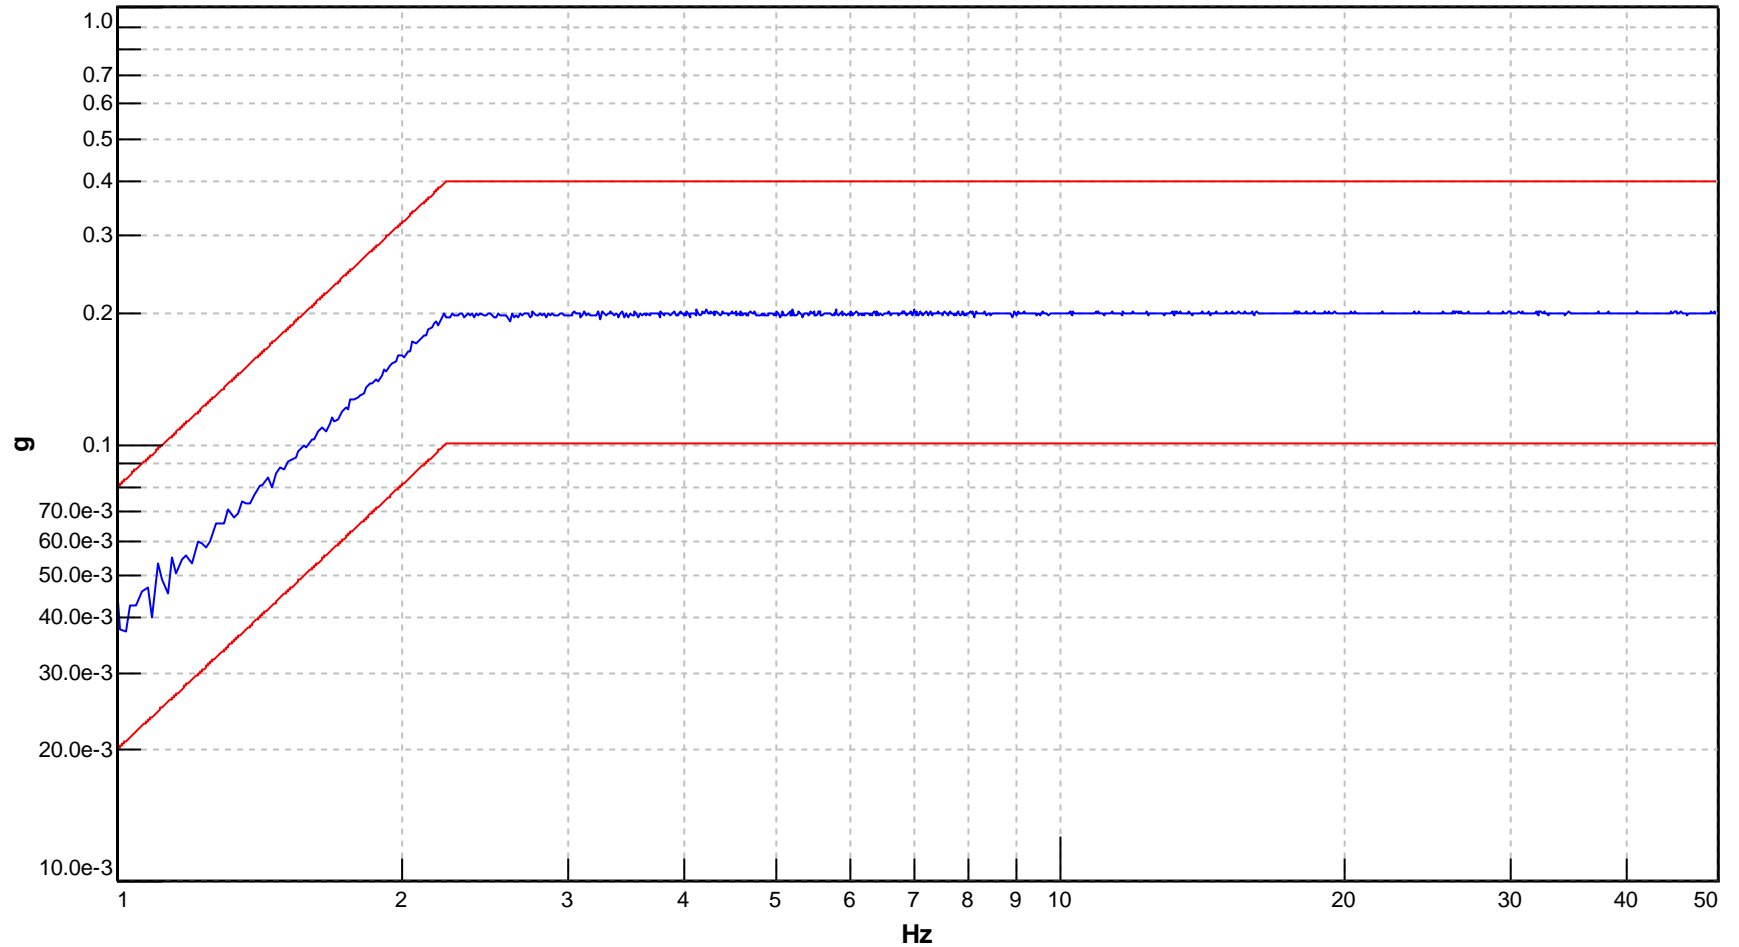

<b>Project:</b> MTL-20-018
<b>Section:</b> Y axis
<b>Run:</b> Sine_2
<b>Date:</b> Wed May 06 2020 10:12:12
<b>Point id:</b> MP1
<b>Reference point id:</b> CP1
<b>Sweep rate:</b> 1 Oct/min

Resonance frequency search


- FRF (Harmonic) MP1:+X/CP1:+Y
- FRF (Harmonic) MP1:+Y/CP1:+Y
- FRF (Harmonic) MP1:+Z/CP1:+Y

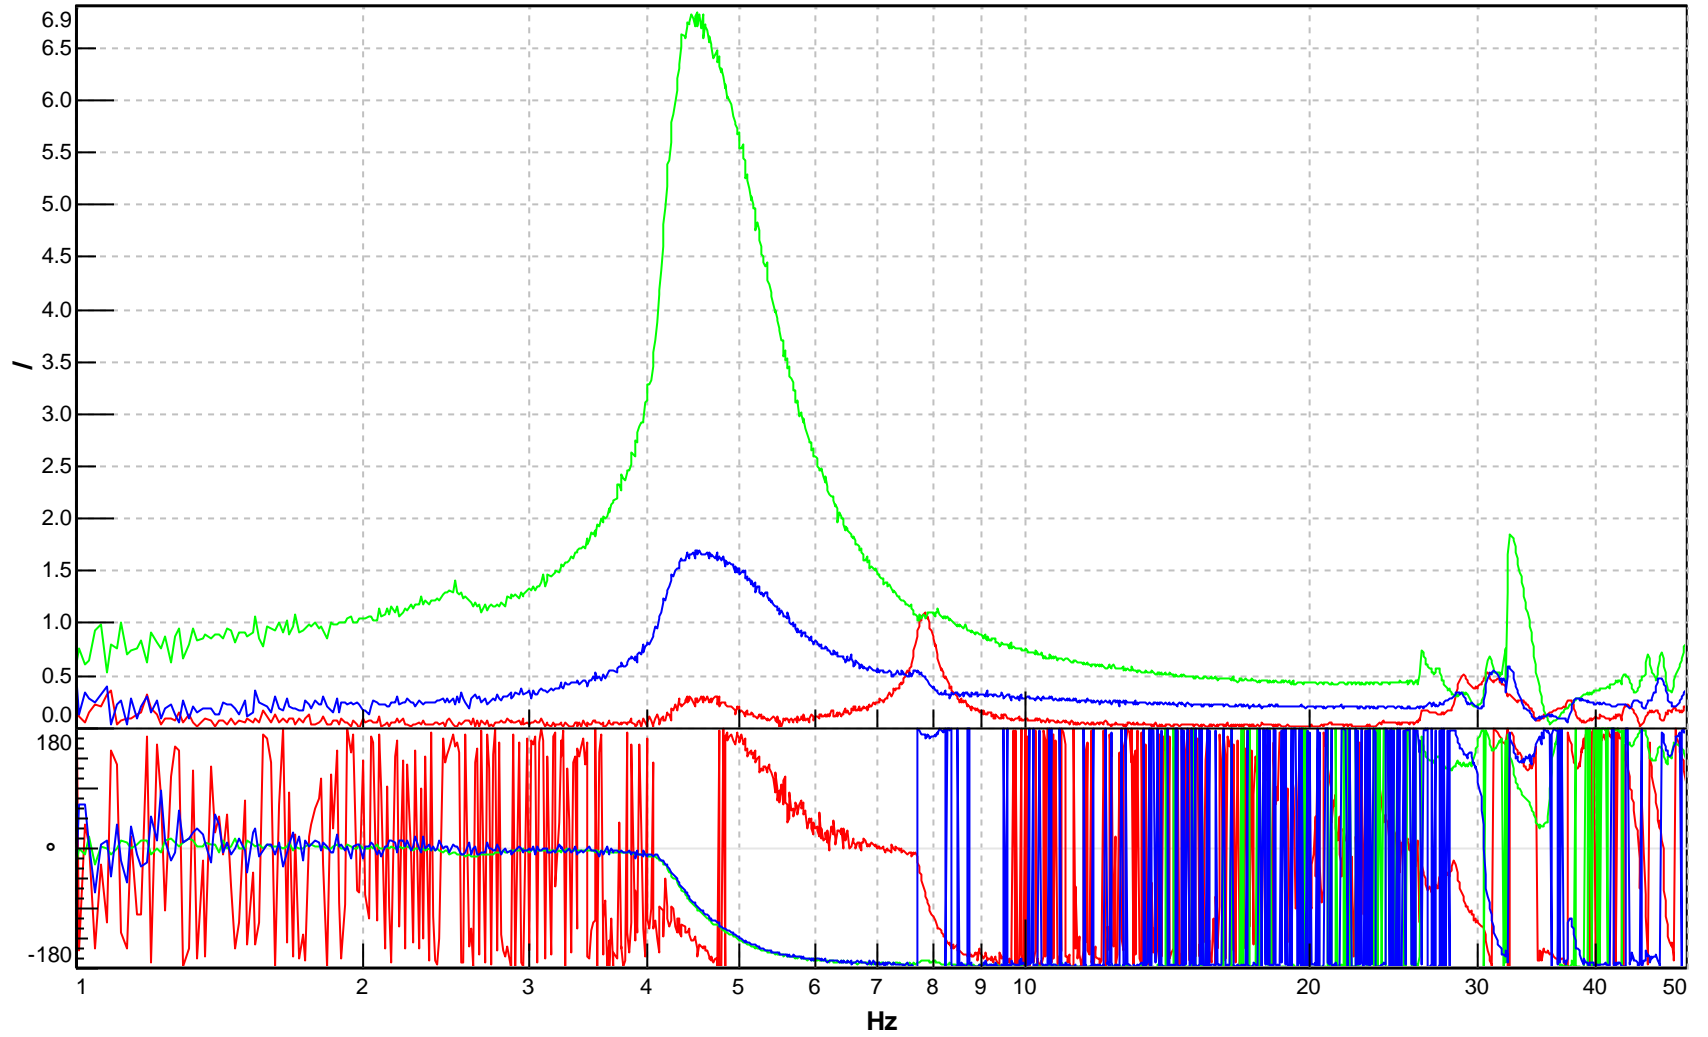

<b>Project:</b> MTL-20-018
<b>Section:</b> Y axis
<b>Run:</b> Sine_2
<b>Date:</b> Wed May 06 2020 10:12:12
<b>Point id:</b> MP2
<b>Reference point id:</b> CP1
<b>Sweep rate:</b> 1 Oct/min



Resonance frequency search

- FRF (Harmonic) MP2:+X/CP1:+Y
- FRF (Harmonic) MP2:+Y/CP1:+Y
- FRF (Harmonic) MP2:+Z/CP1:+Y

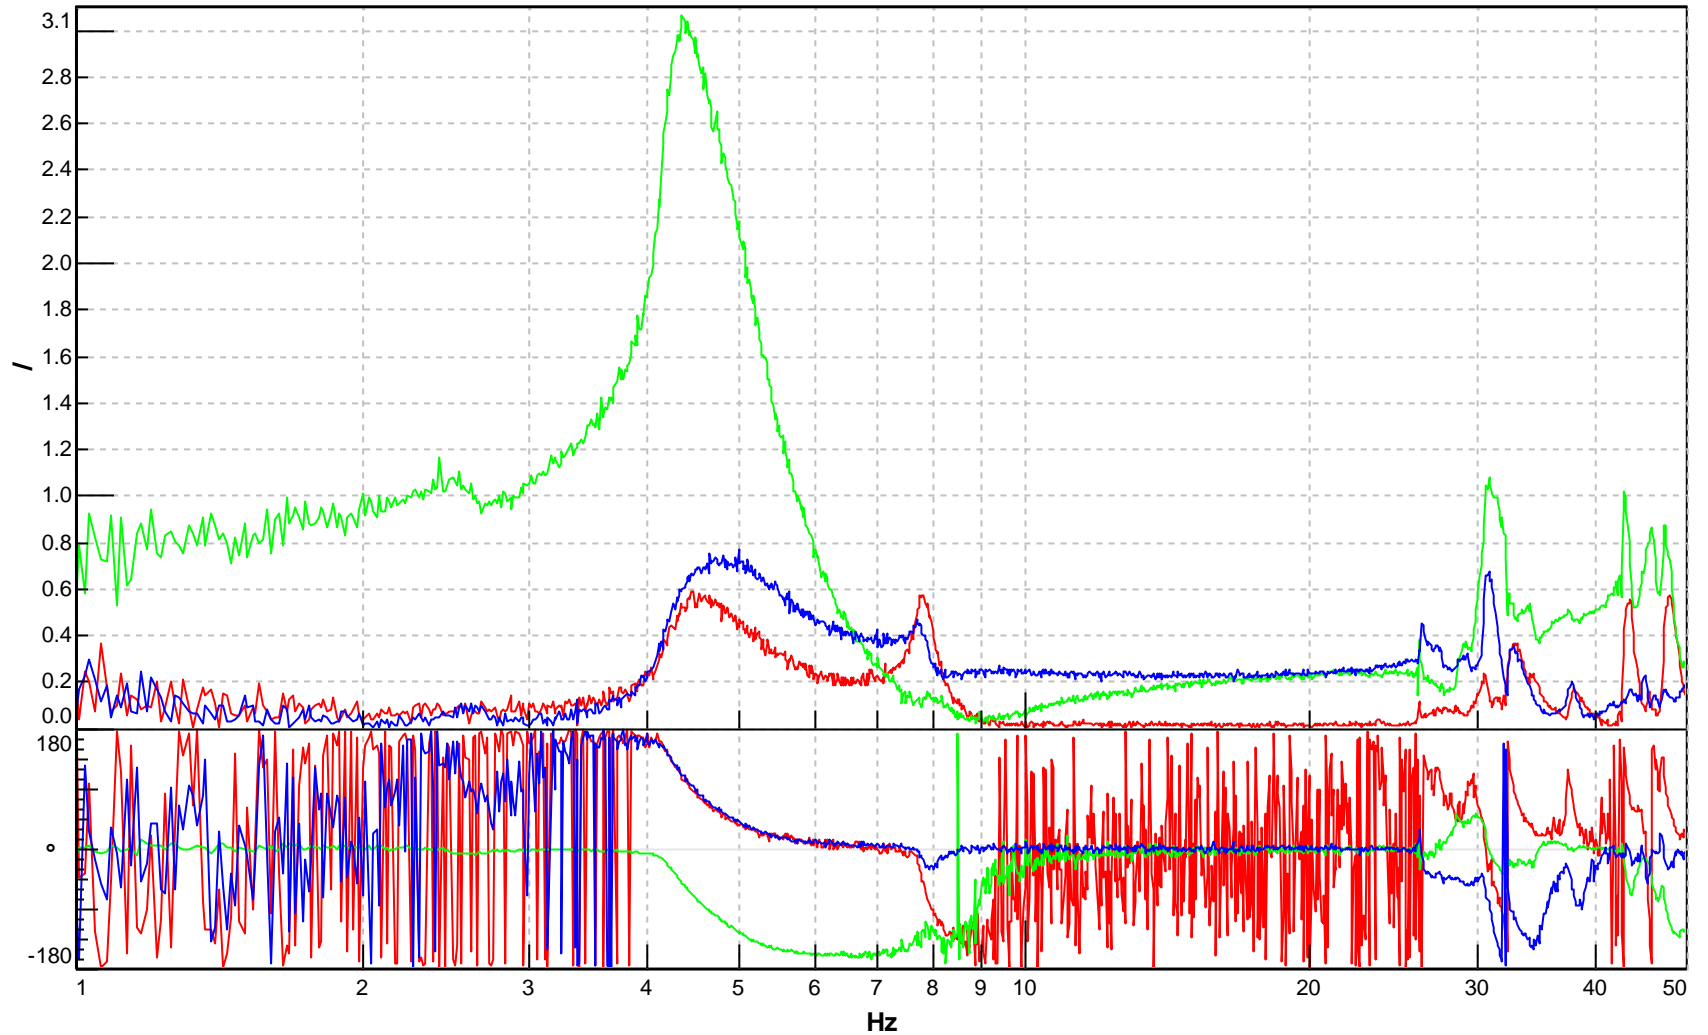

<b>Project:</b> MTL-20-018
<b>Section:</b> Z axis
<b>Run:</b> Sine_1
<b>Date:</b> Wed May 06 2020 11:21:27
<b>Point id:</b> AvgCtrl
<b>No. control channels:</b> 1
<b>Control strategy:</b> Average
<b>Sweep rate:</b> 1 Oct/min


Resonance frequency search

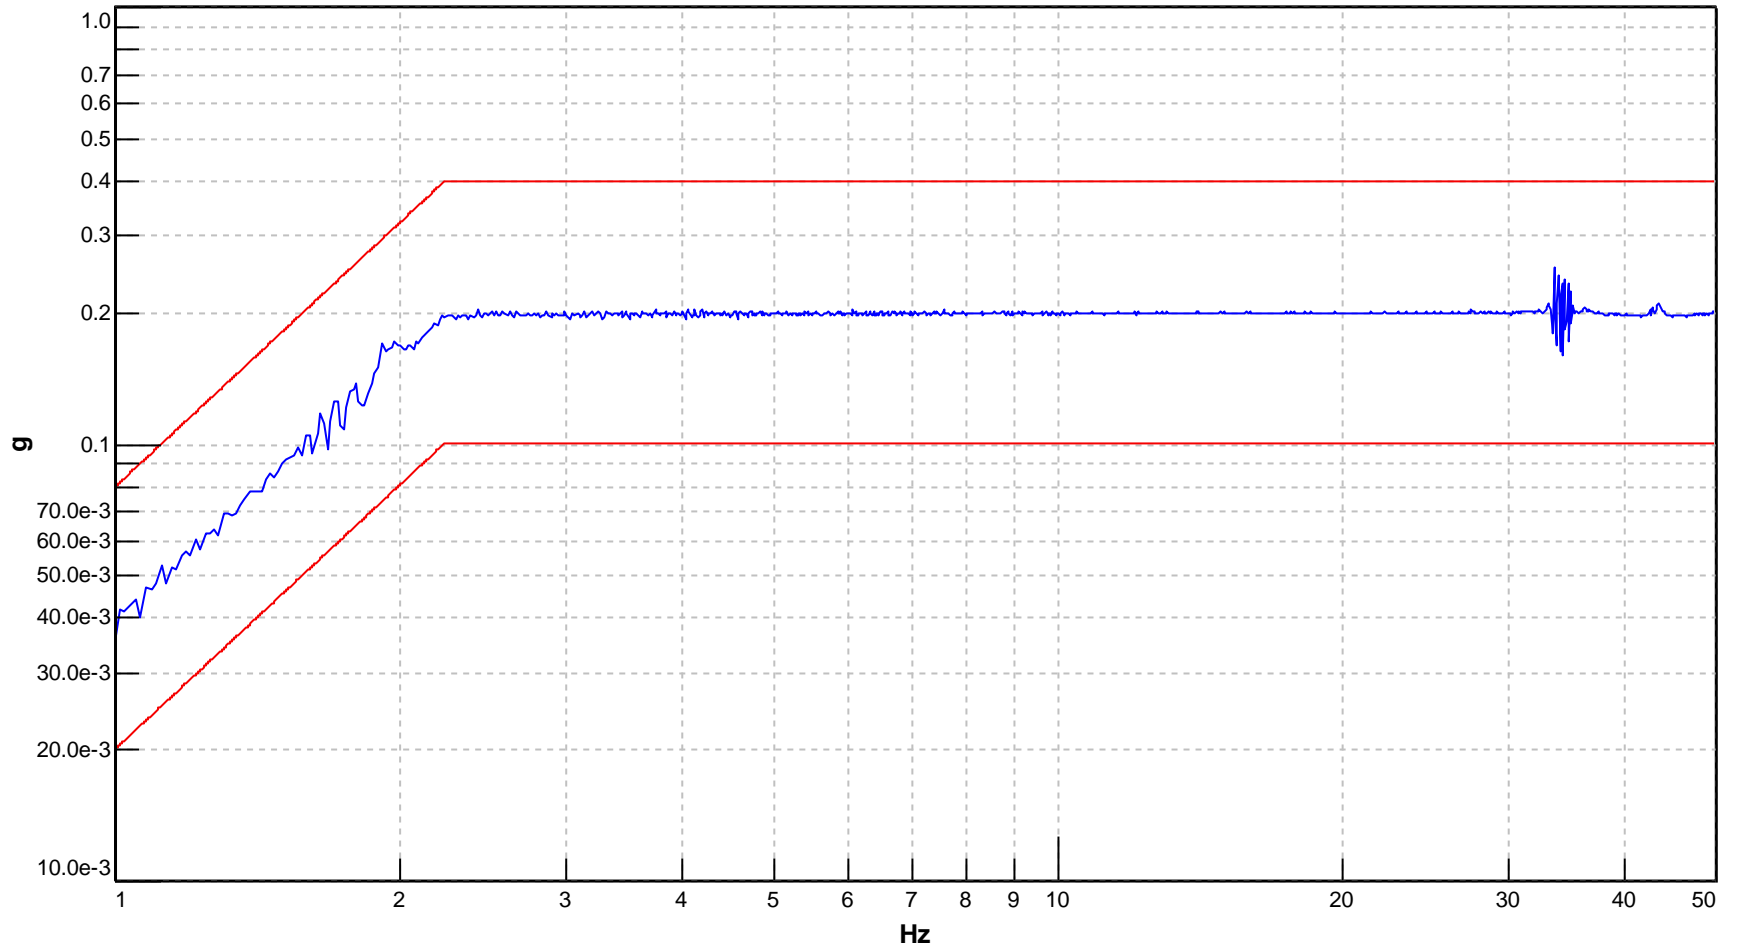

<b>Project:</b> MTL-20-018
<b>Section:</b> Z axis
<b>Run:</b> Sine_1
<b>Date:</b> Wed May 06 2020 11:21:27
<b>Point id:</b> MP1
<b>Reference point id:</b> CP1
<b>Sweep rate:</b> 1 Oct/min

Resonance frequency search


- FRF (Harmonic) MP1:+X/CP1:+Z
- FRF (Harmonic) MP1:+Y/CP1:+Z
- FRF (Harmonic) MP1:+Z/CP1:+Z

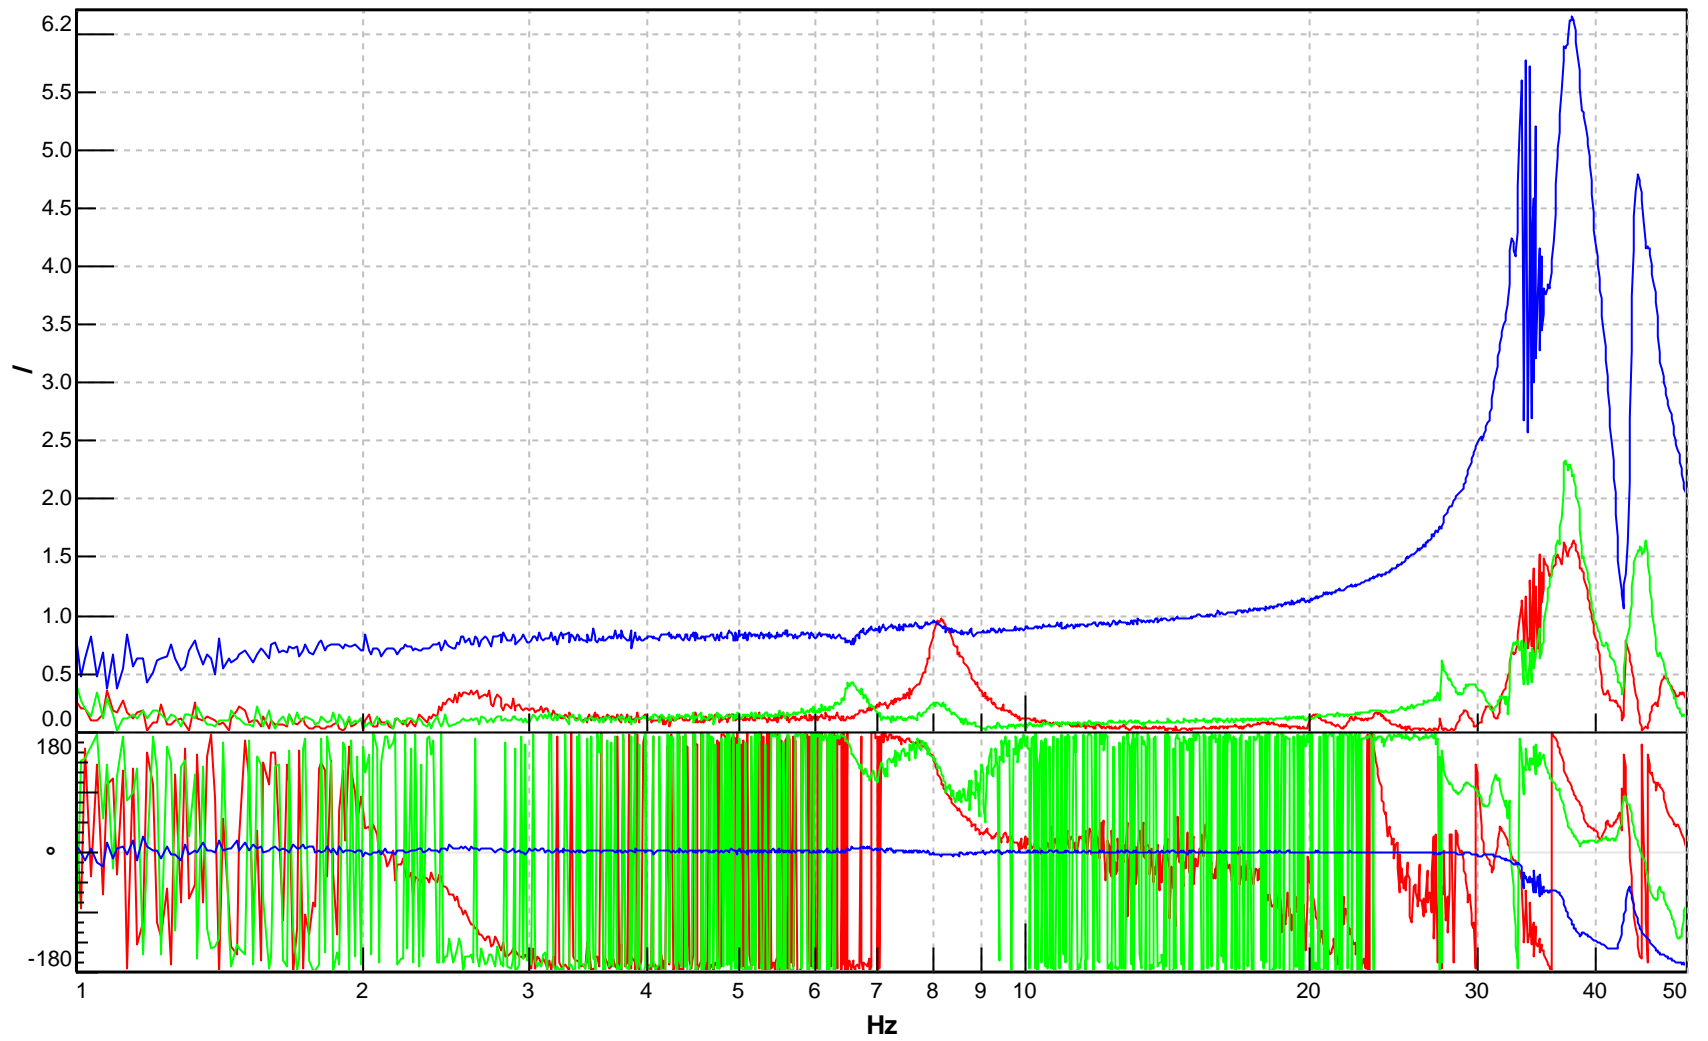



<b>Project:</b> MTL-20-018
<b>Section:</b> Z axis
<b>Run:</b> Sine_1
<b>Date:</b> Wed May 06 2020 11:21:27
<b>Point id:</b> MP2
<b>Reference point id:</b> CP1
<b>Sweep rate:</b> 1 Oct/min

Resonance frequency search




- FRF (Harmonic) MP2:+X/CP1:+Z
- FRF (Harmonic) MP2:+Y/CP1:+Z
- FRF (Harmonic) MP2:+Z/CP1:+Z

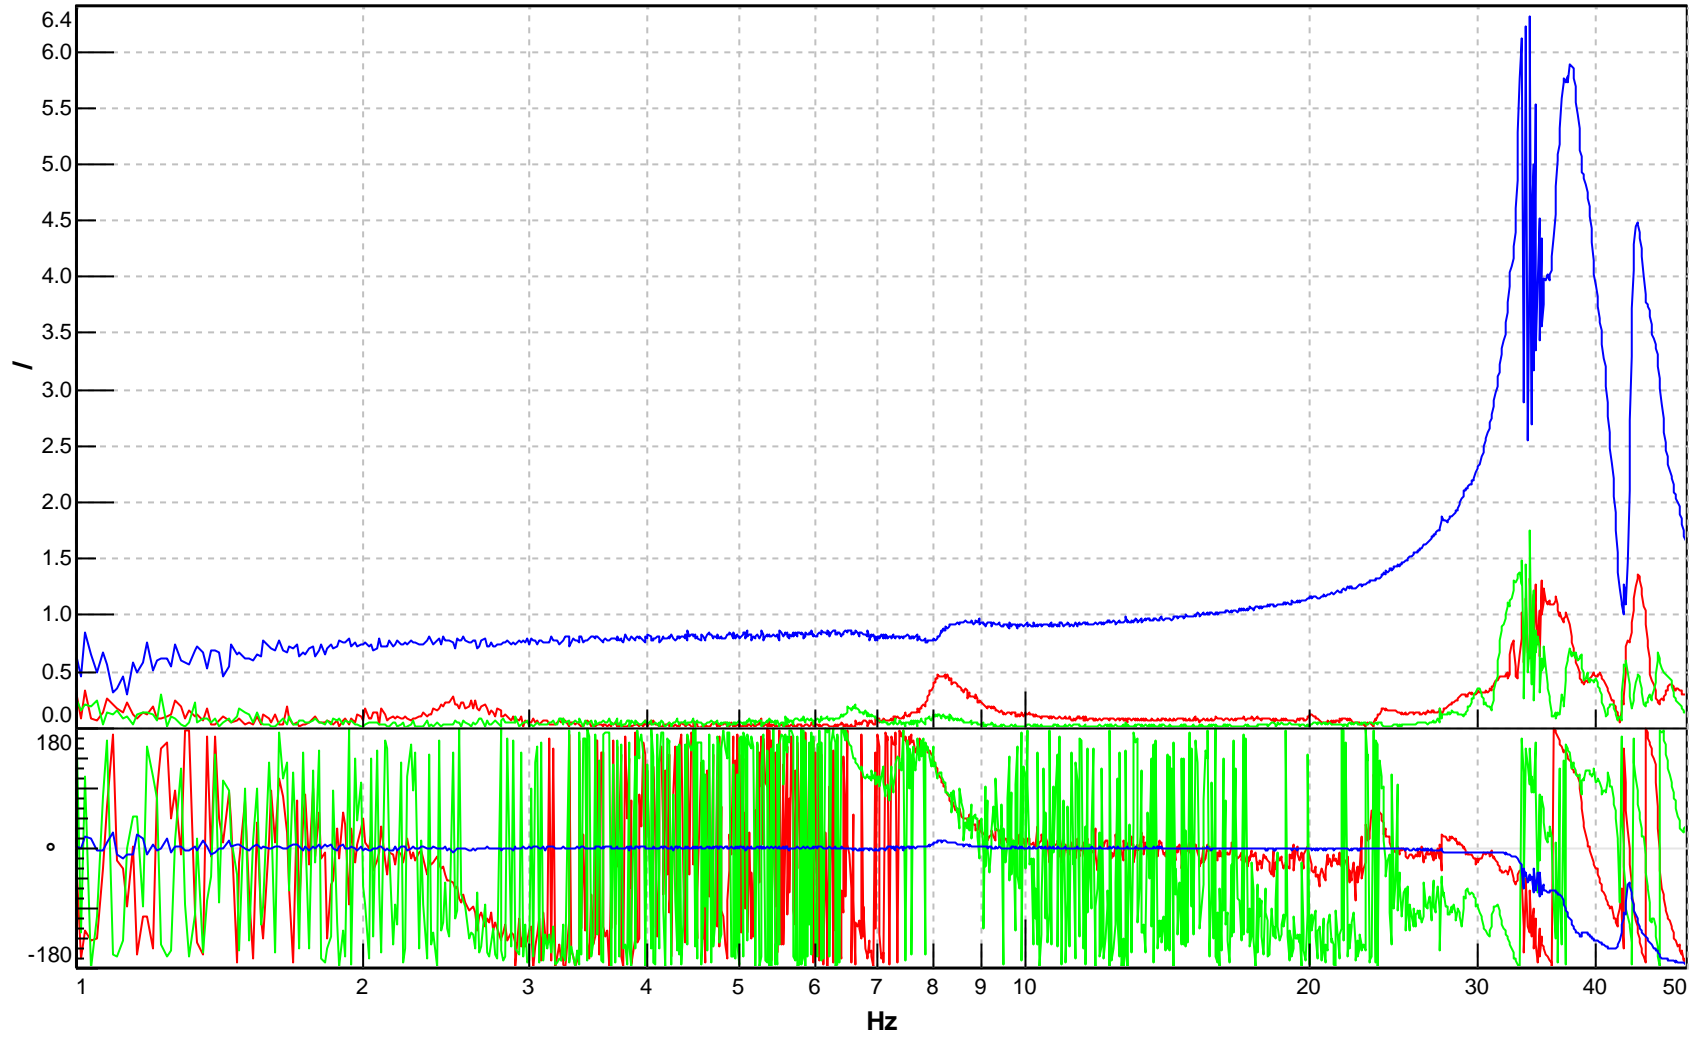




<b>Project:</b> MTL-20-018
<b>Section:</b> Z axis
<b>Run:</b> Shock_1
<b>Date:</b> Wed May 06 2020 11:27:42

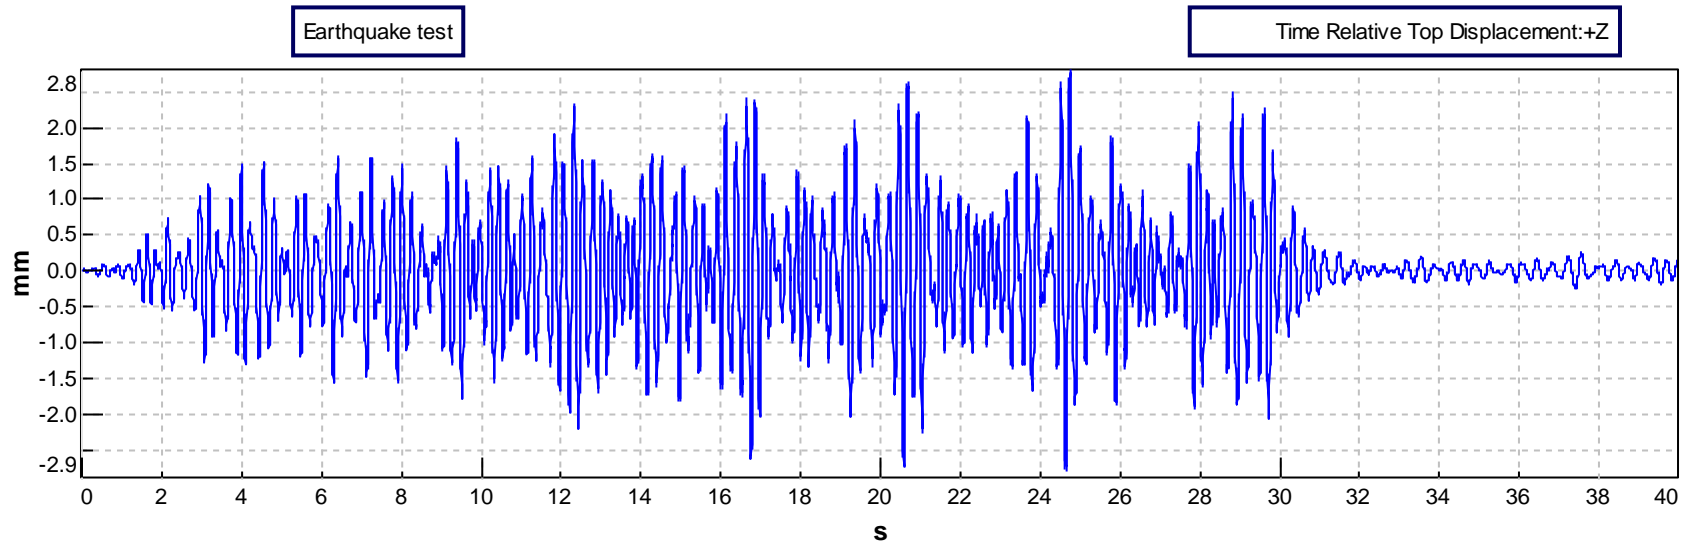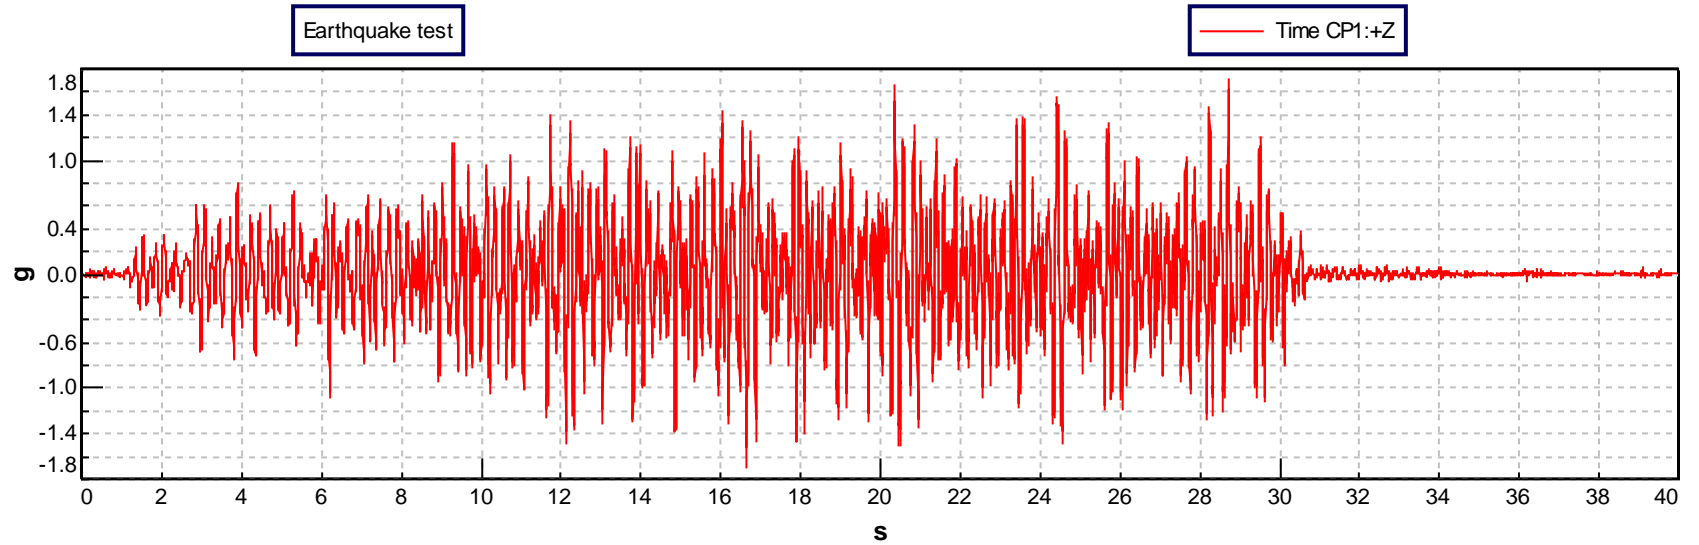

<b>Project:</b> MTL-20-018
<b>Section:</b> Z axis
<b>Run:</b> Shock_1
<b>Date:</b> Wed May 06 2020 11:27:42

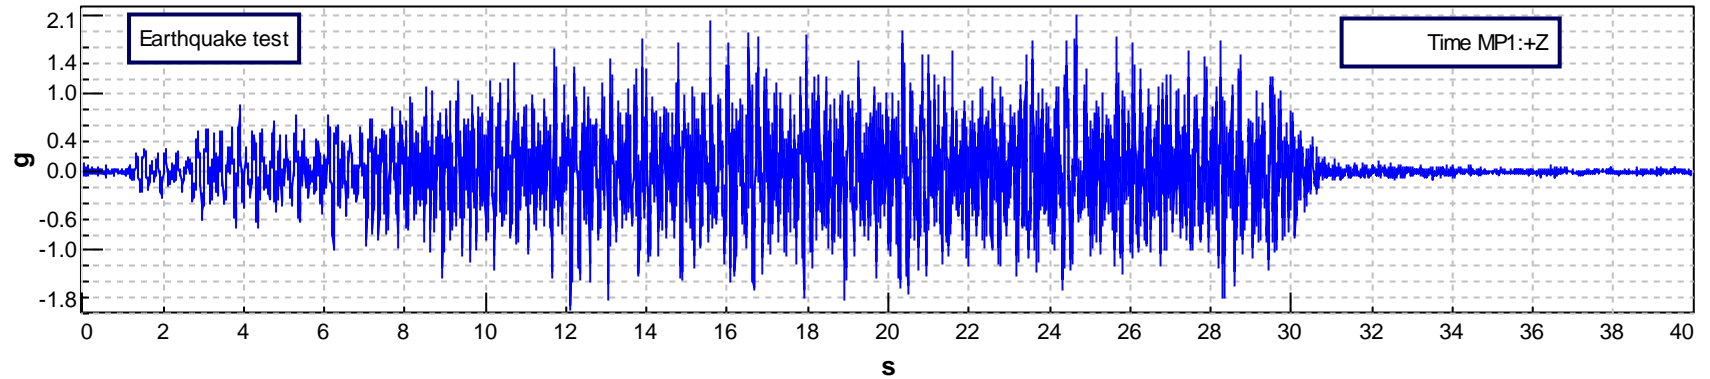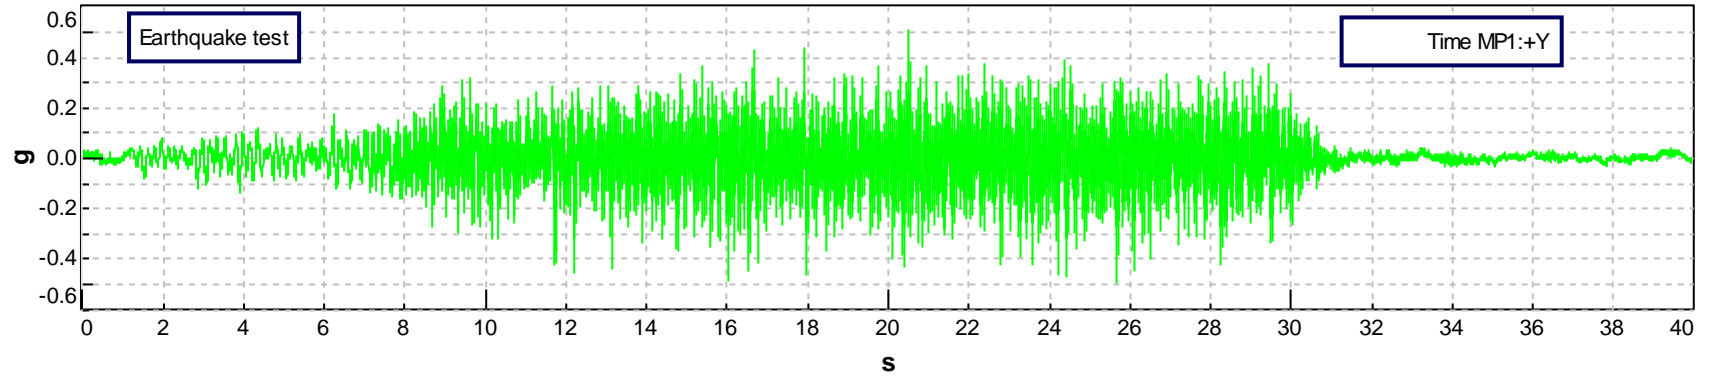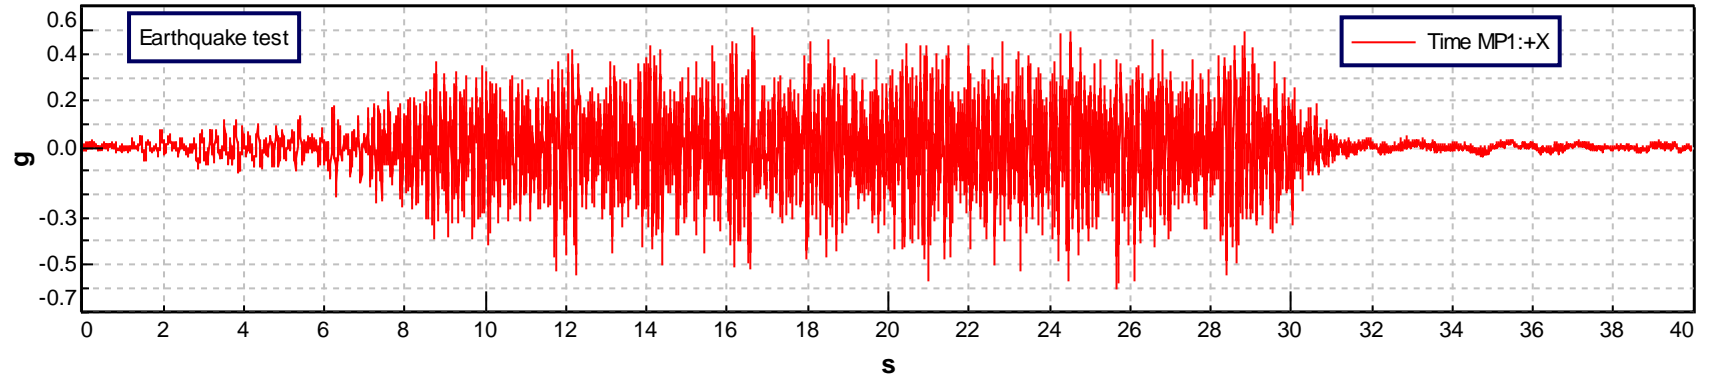

<b>Project:</b> MTL-20-018
<b>Section:</b> Z axis
<b>Run:</b> Shock_1
<b>Date:</b> Wed May 06 2020 11:27:42

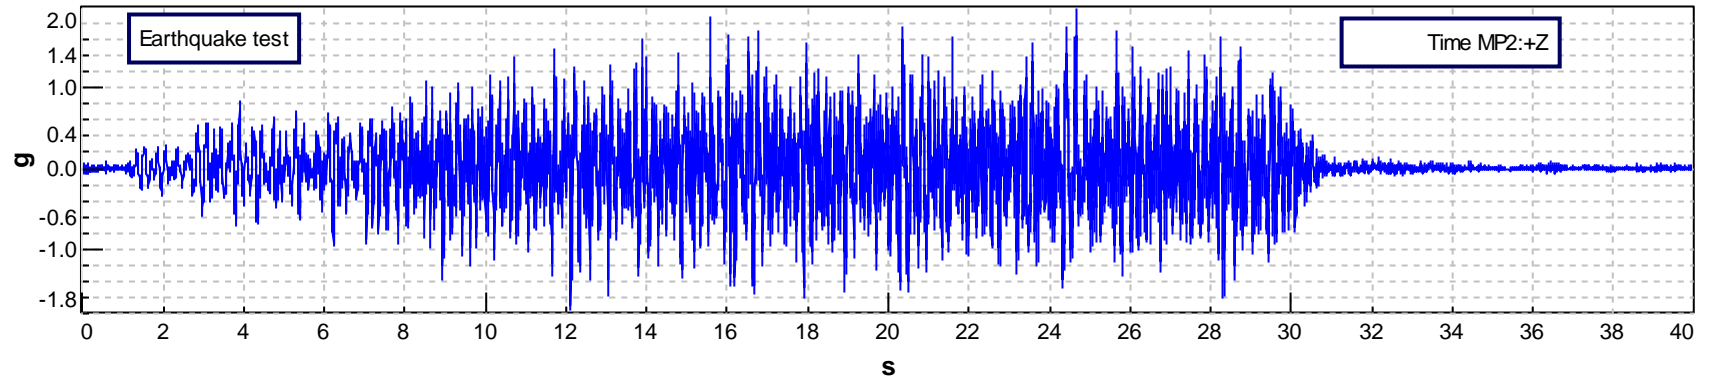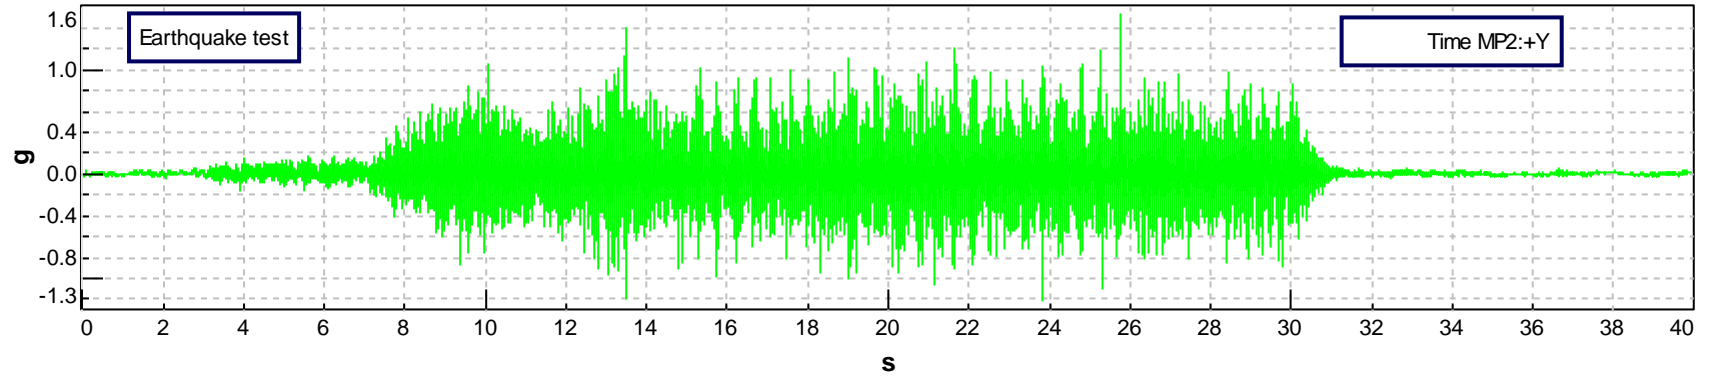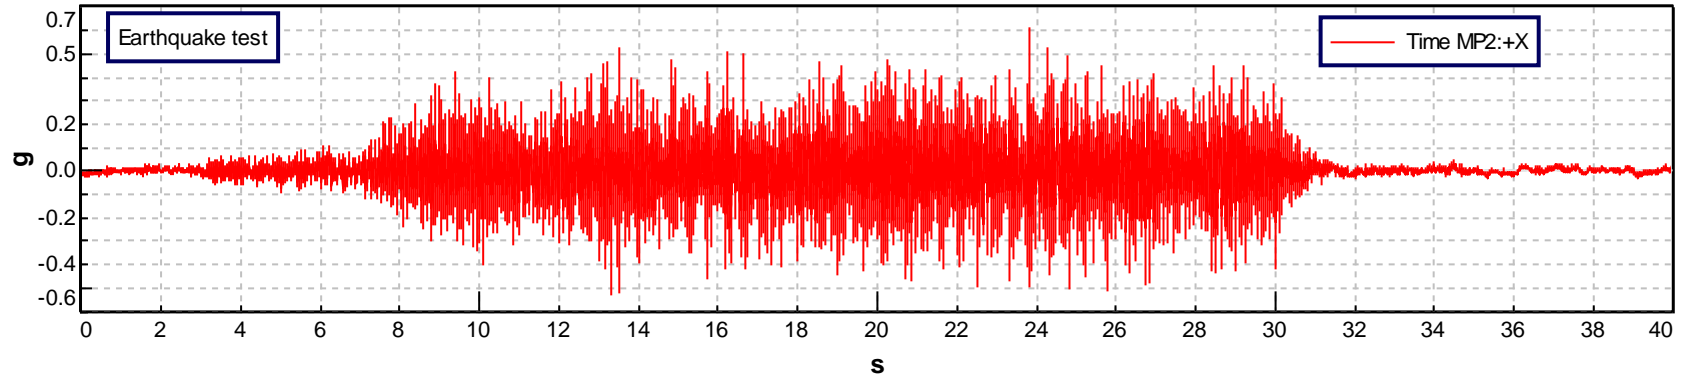

**Project:**  
MTL-20-018


**Section:**  
Z axis

**Run:**  
Shock\_1

**Date:**  
Wed May 06 2020 11:27:42



Earthquake test

— TRS CP1:+Z  
- - - Telcordia RRS - Zone 4

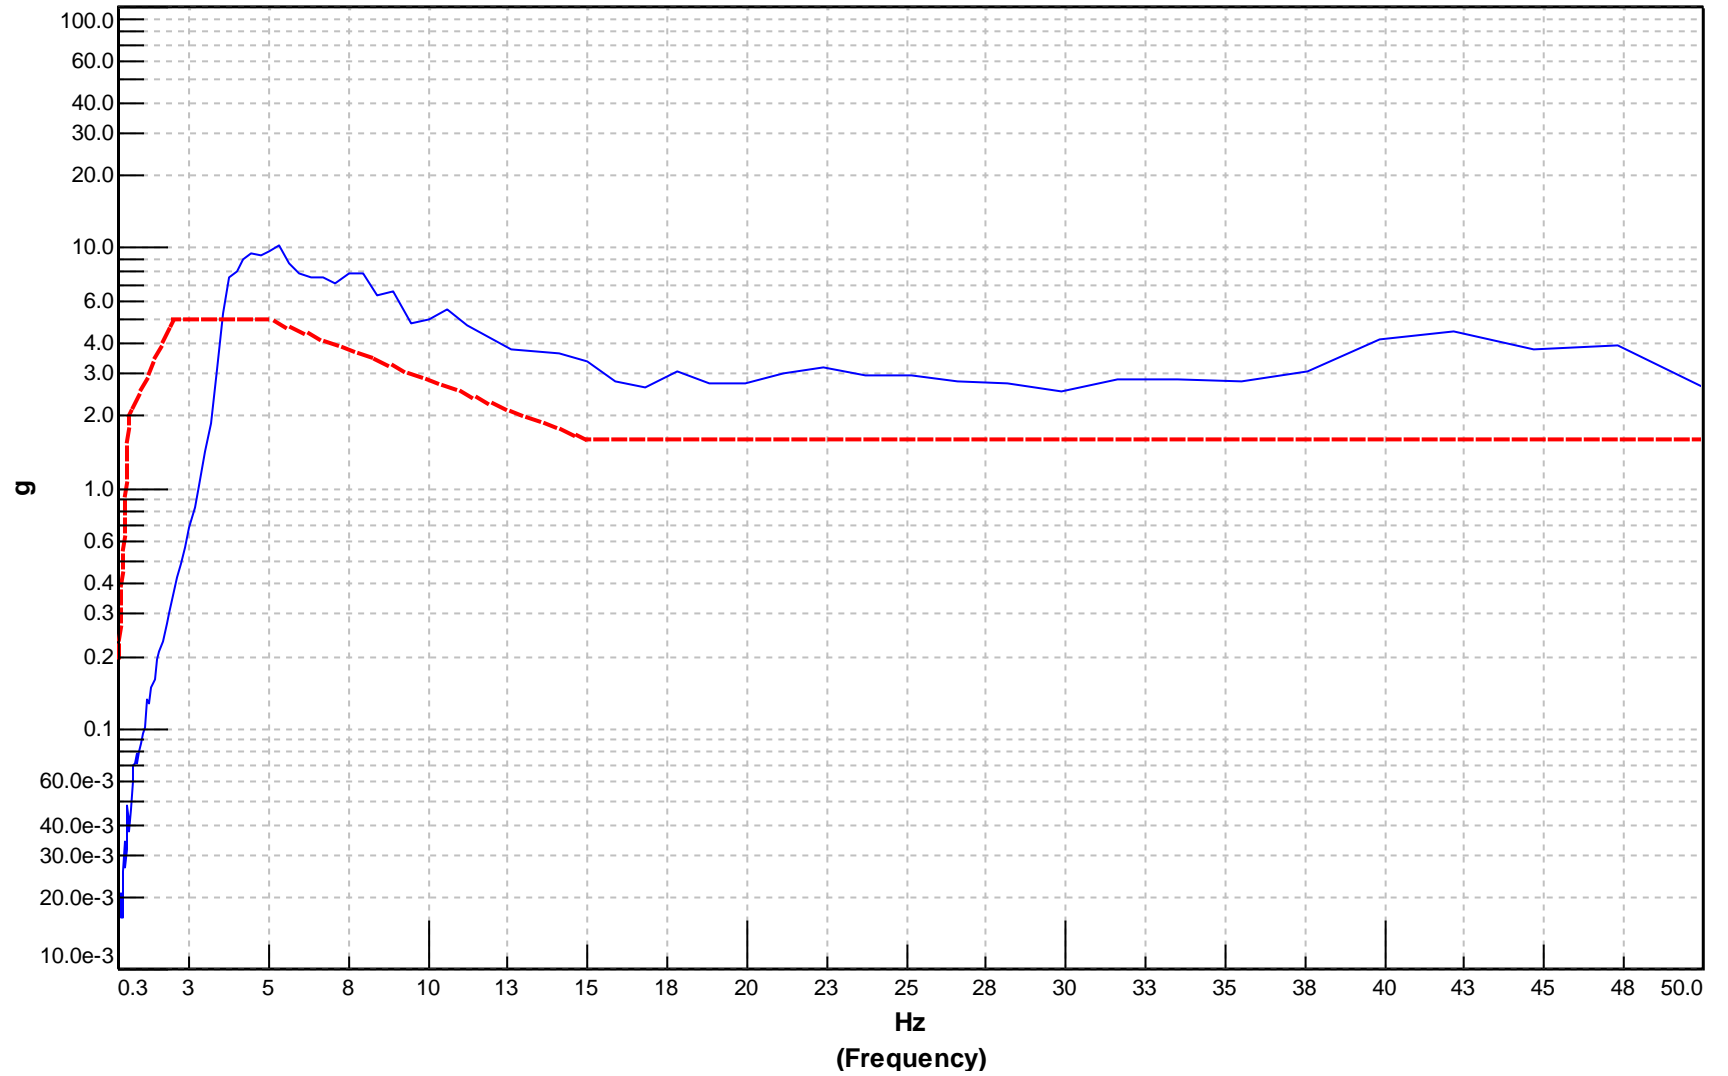

<b>Project:</b> MTL-20-018
<b>Section:</b> Z axis
<b>Run:</b> Sine_2
<b>Date:</b> Wed May 06 2020 11:45:38
<b>Point id:</b> AvgCtrl
<b>No. control channels:</b> 1
<b>Control strategy:</b> Average
<b>Sweep rate:</b> 1 Oct/min


Resonance frequency search

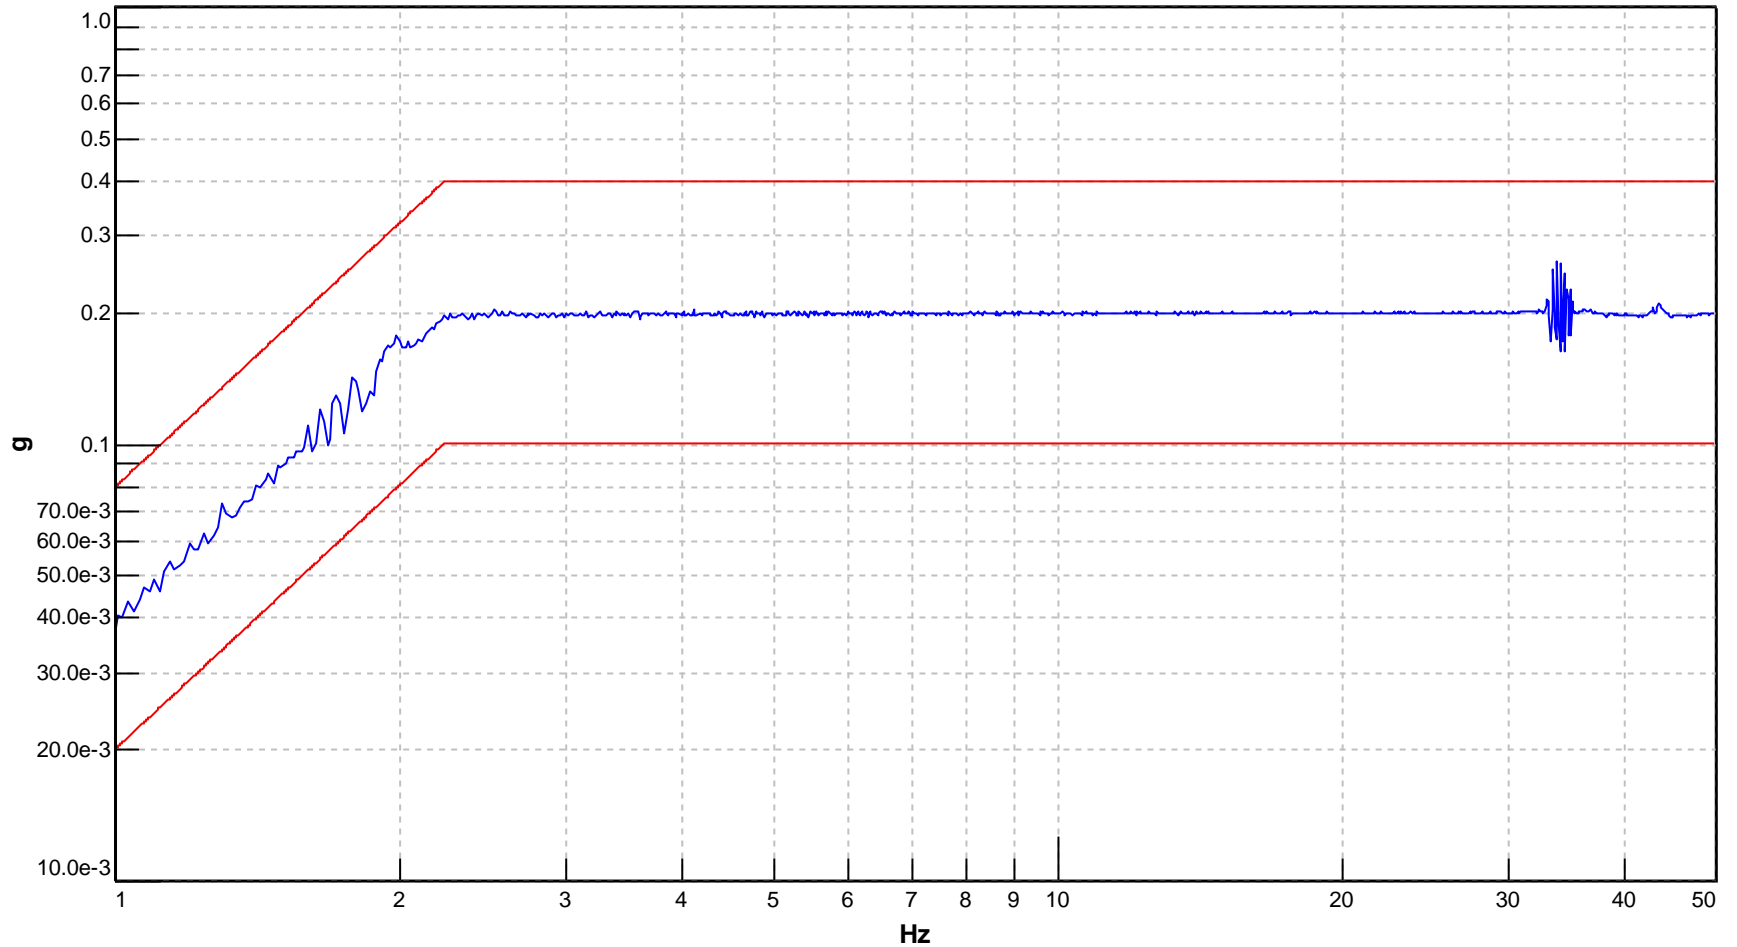

<b>Project:</b> MTL-20-018
<b>Section:</b> Z axis
<b>Run:</b> Sine_2
<b>Date:</b> Wed May 06 2020 11:45:38
<b>Point id:</b> MP1
<b>Reference point id:</b> CP1
<b>Sweep rate:</b> 1 Oct/min

Resonance frequency search

- FRF (Harmonic) MP1:+X/CP1:+Z
- FRF (Harmonic) MP1:+Y/CP1:+Z
- FRF (Harmonic) MP1:+Z/CP1:+Z

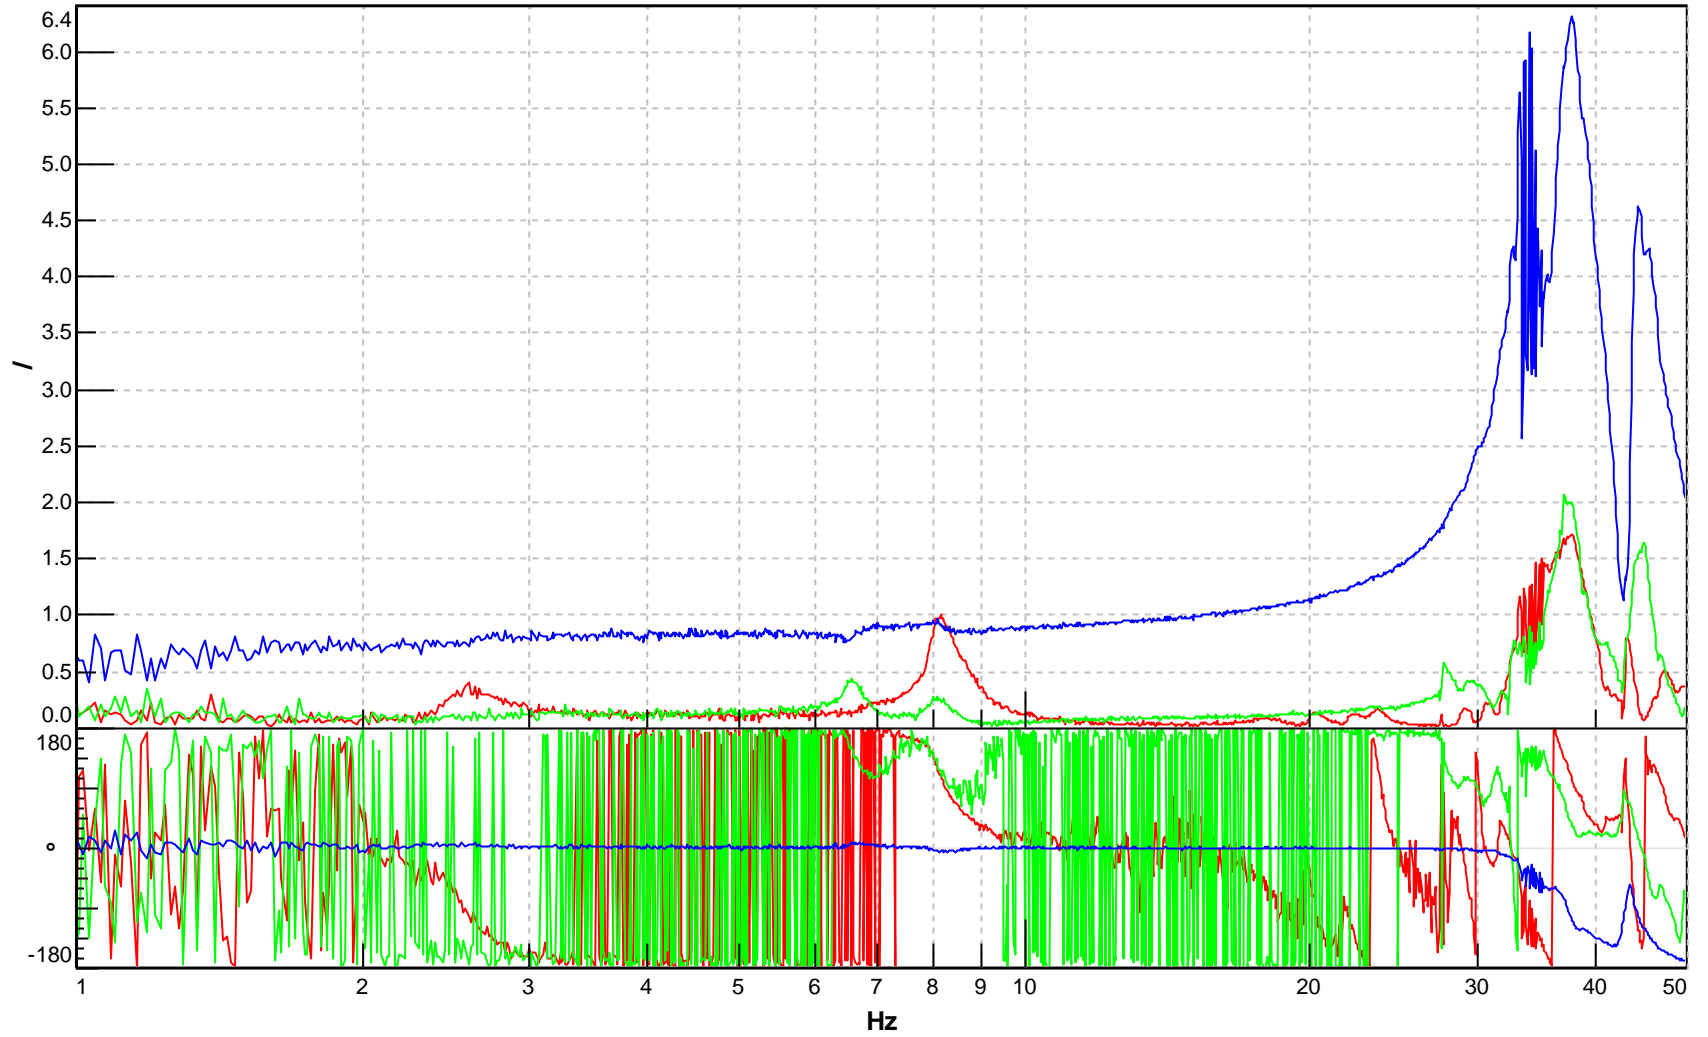

<b>Project:</b> MTL-20-018
<b>Section:</b> Z axis
<b>Run:</b> Sine_2
<b>Date:</b> Wed May 06 2020 11:45:38
<b>Point id:</b> MP2
<b>Reference point id:</b> CP1
<b>Sweep rate:</b> 1 Oct/min

Resonance frequency search

- FRF (Harmonic) MP2:+X/CP1:+Z
- FRF (Harmonic) MP2:+Y/CP1:+Z
- FRF (Harmonic) MP2:+Z/CP1:+Z

